


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 63

FIRE RATING: 1 HOUR

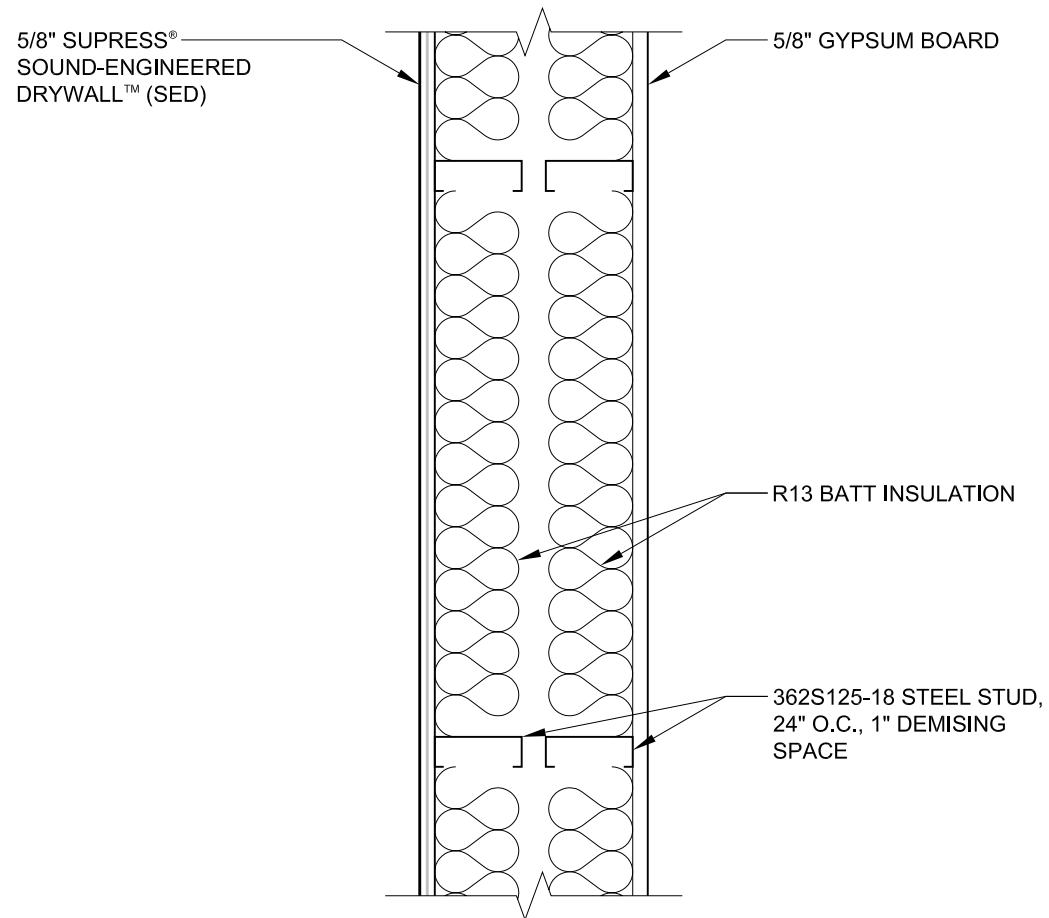


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 64

FIRE RATING: 1 HOUR

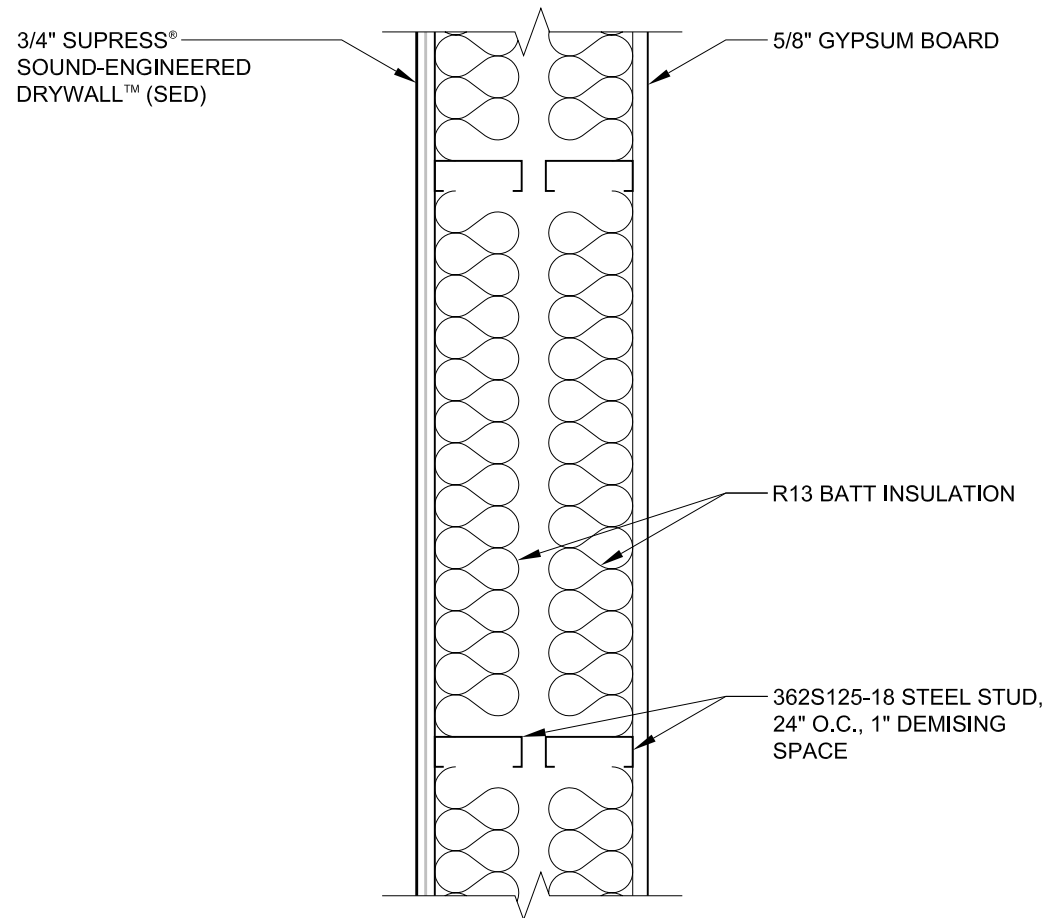


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 66

FIRE RATING: 1 HOUR

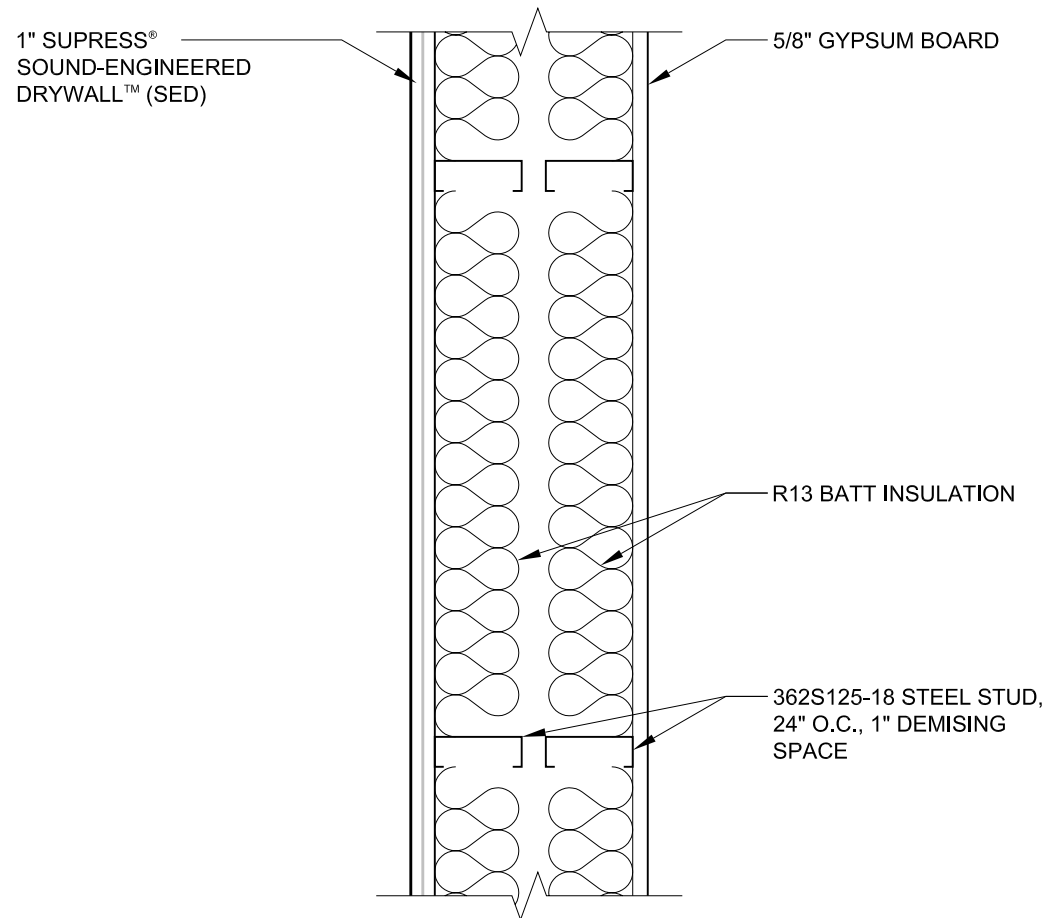


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 68

FIRE RATING: 1 HOUR

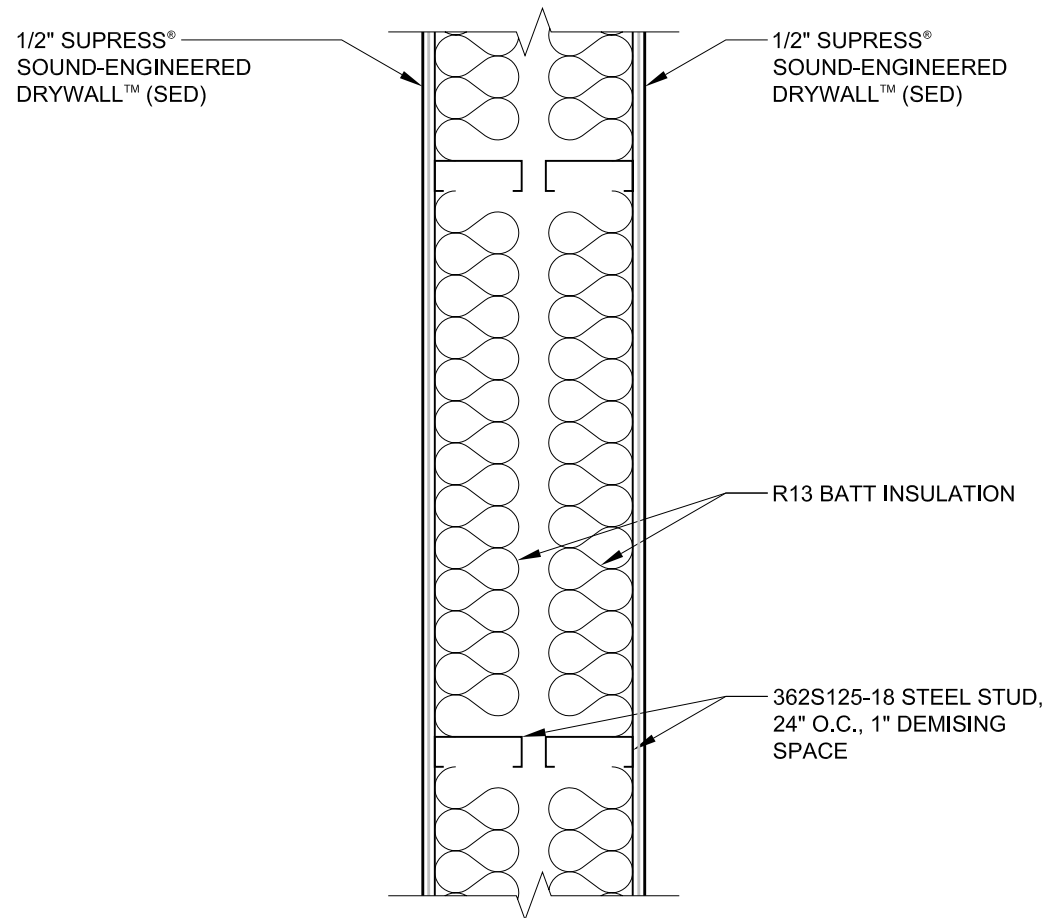


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 64

FIRE RATING: 1 HOUR

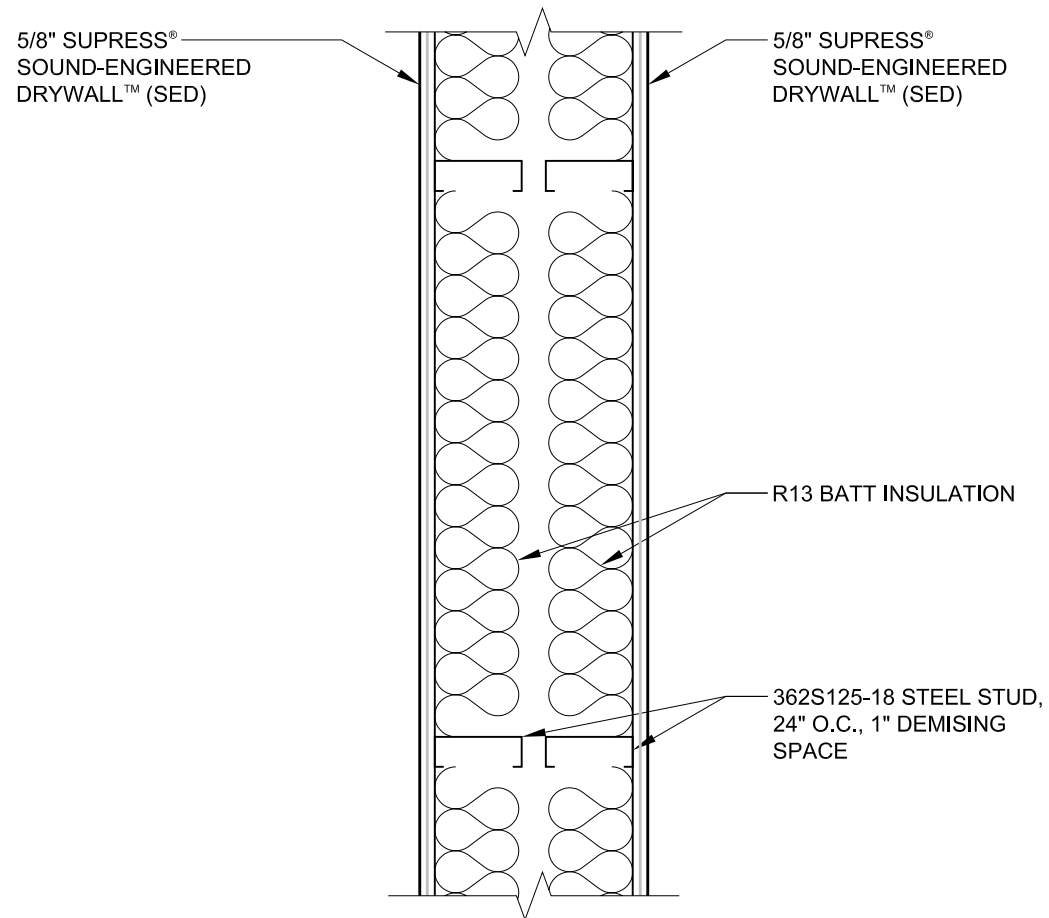


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 66

FIRE RATING: 1 HOUR

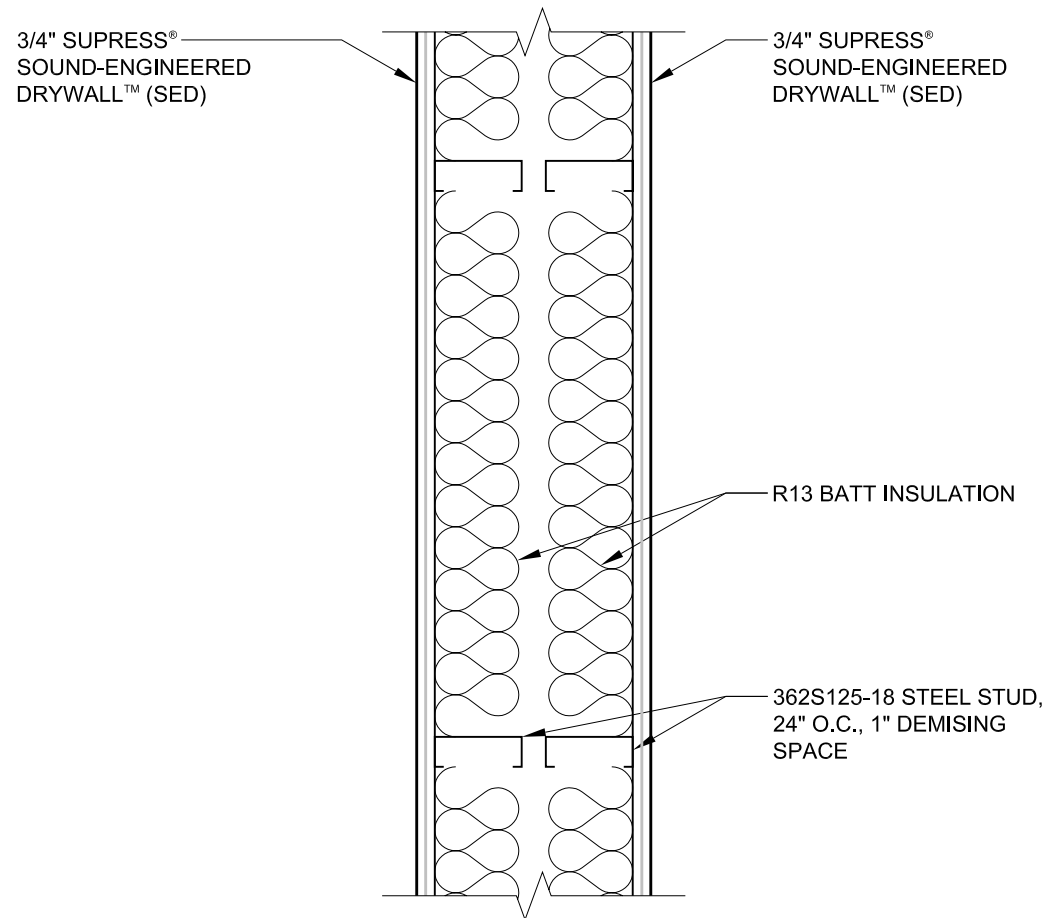


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 70

FIRE RATING: 1 HOUR

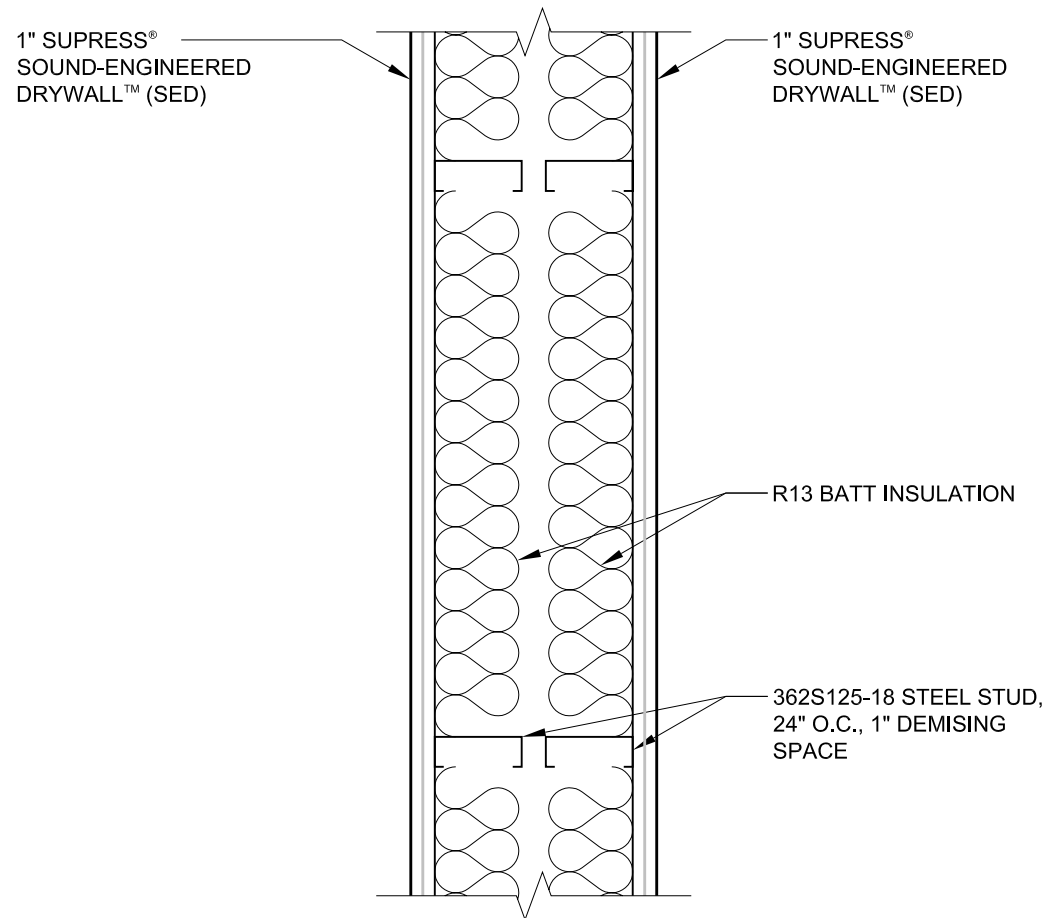

NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 74

FIRE RATING: 2 HOUR