


REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES


STC: 58

FIRE RATING: 1 HOUR

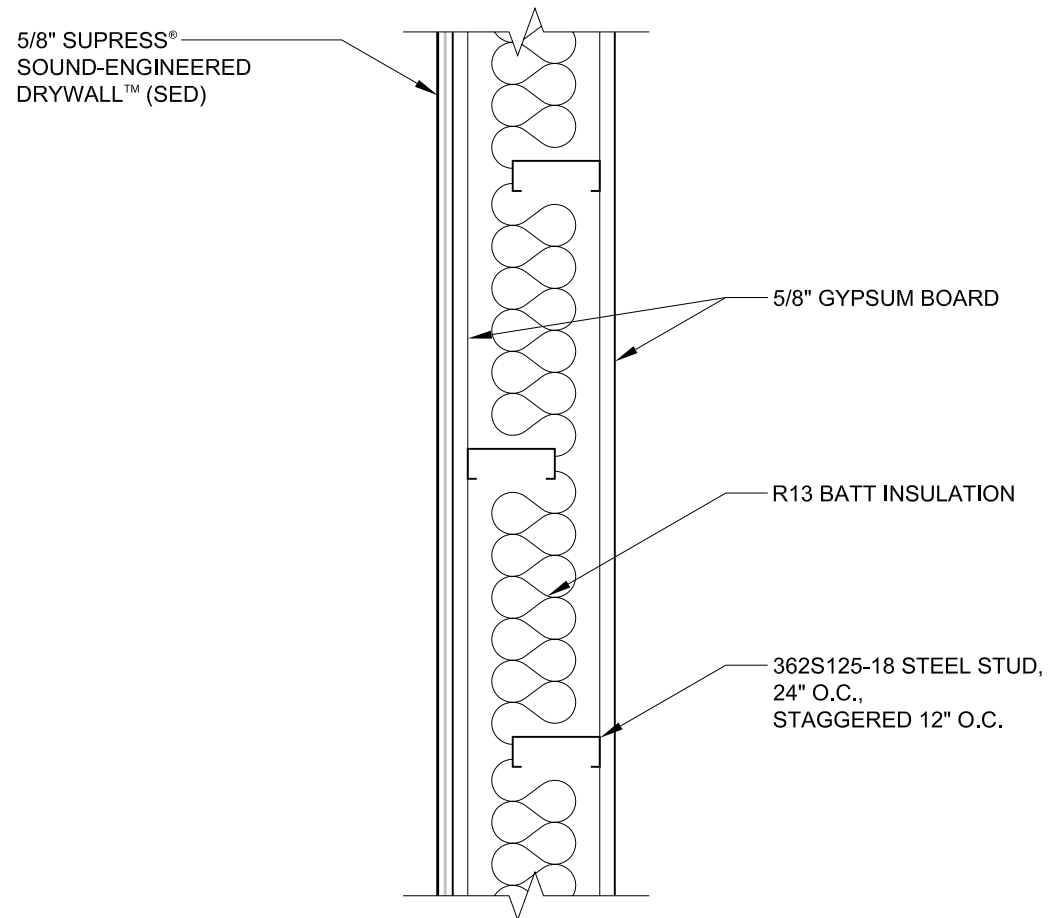

REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 60
FIRE RATING: 1 HOUR

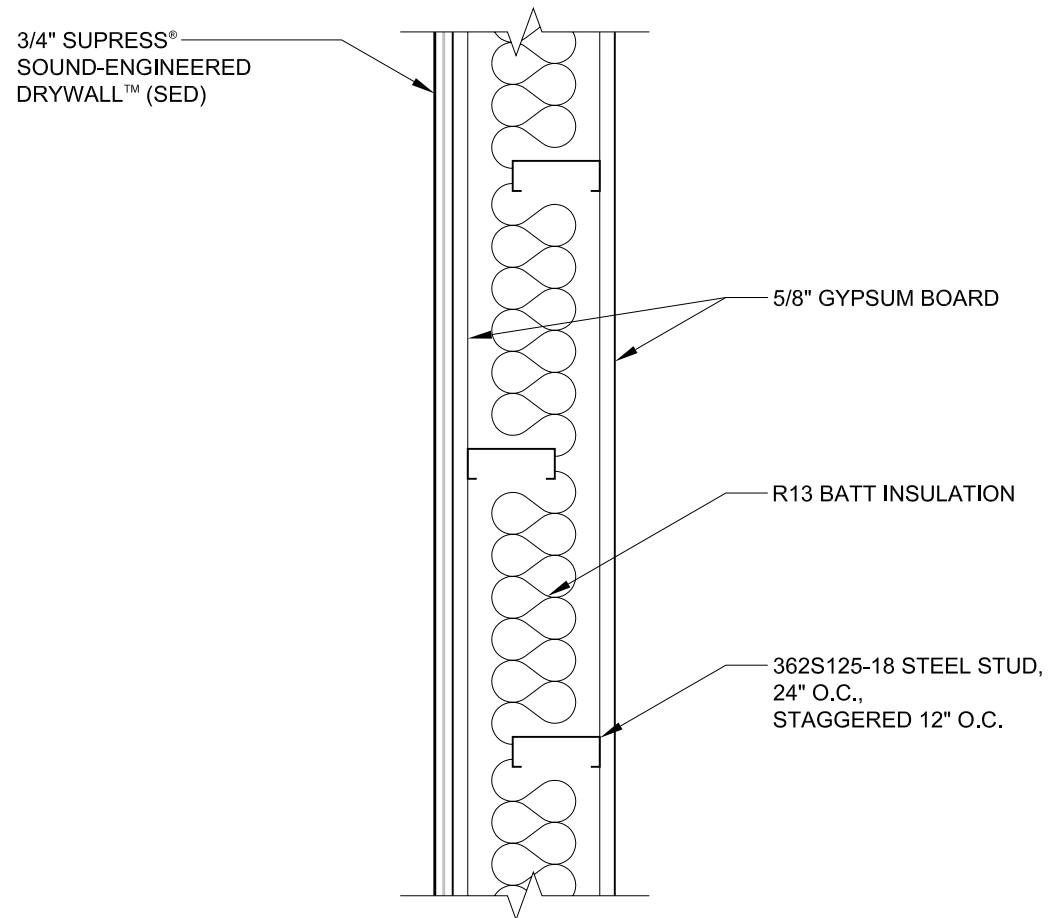


REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES

STC: 65

FIRE RATING: 1 HOUR

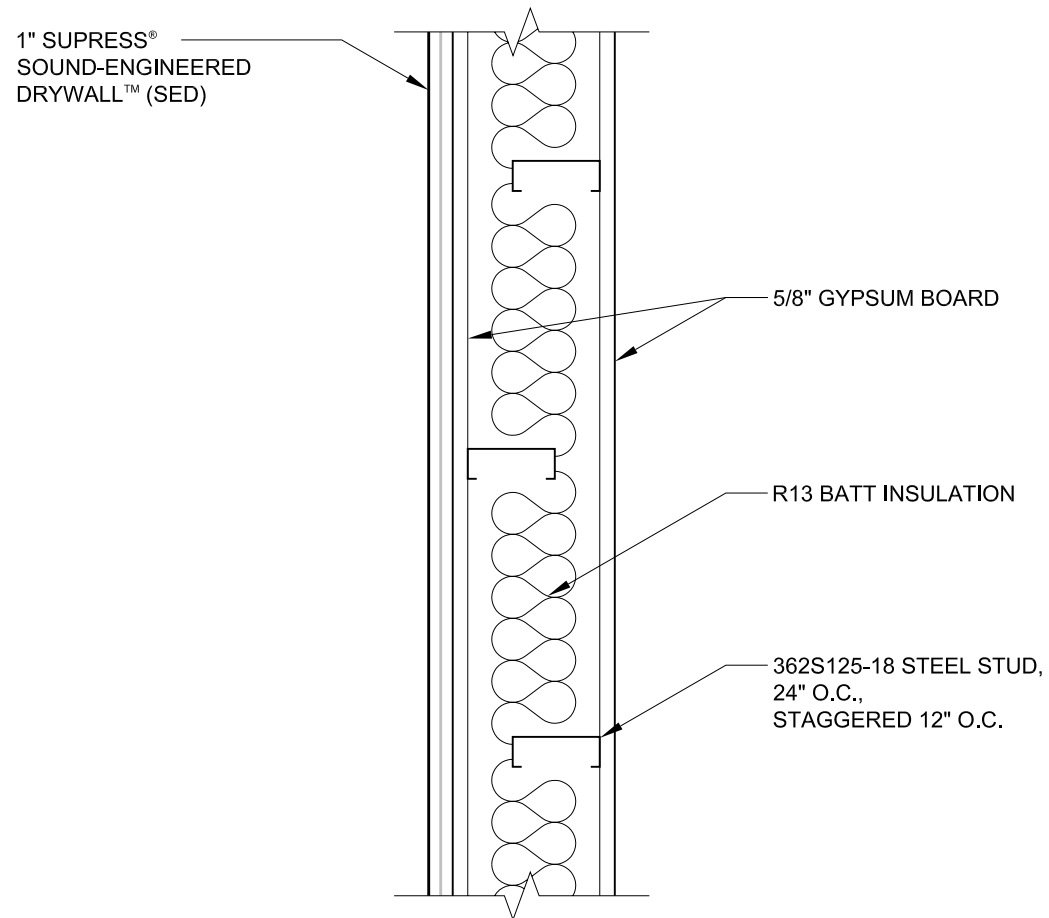


REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES


STC: 68

FIRE RATING: 1 HOUR

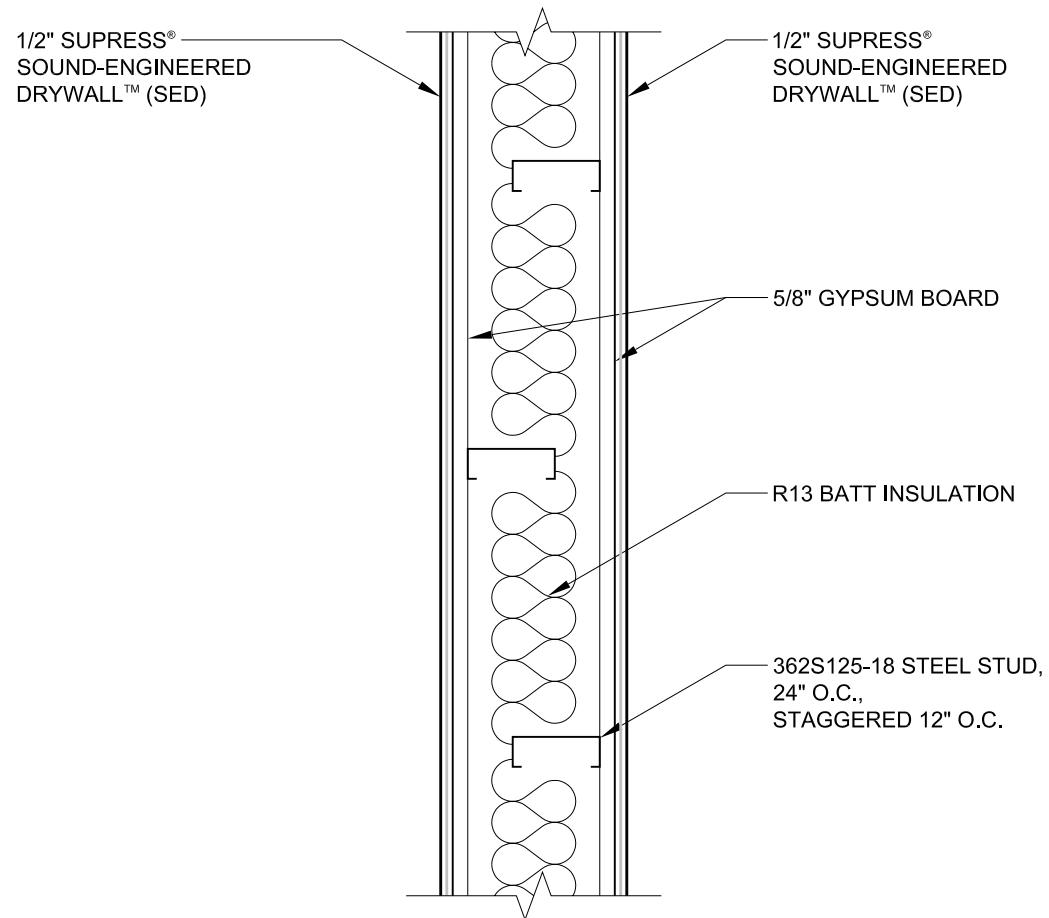


REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 60
 FIRE RATING: 2 HOUR

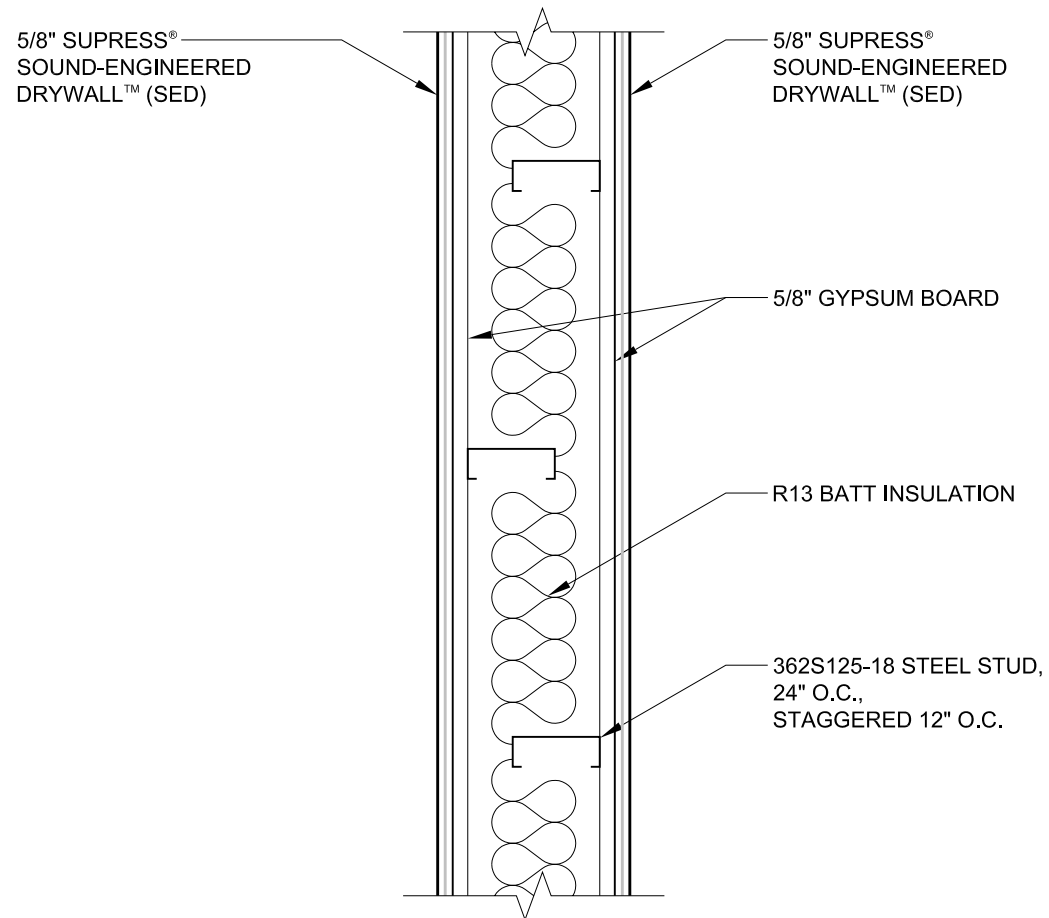


REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 62
 FIRE RATING: 2 HOUR

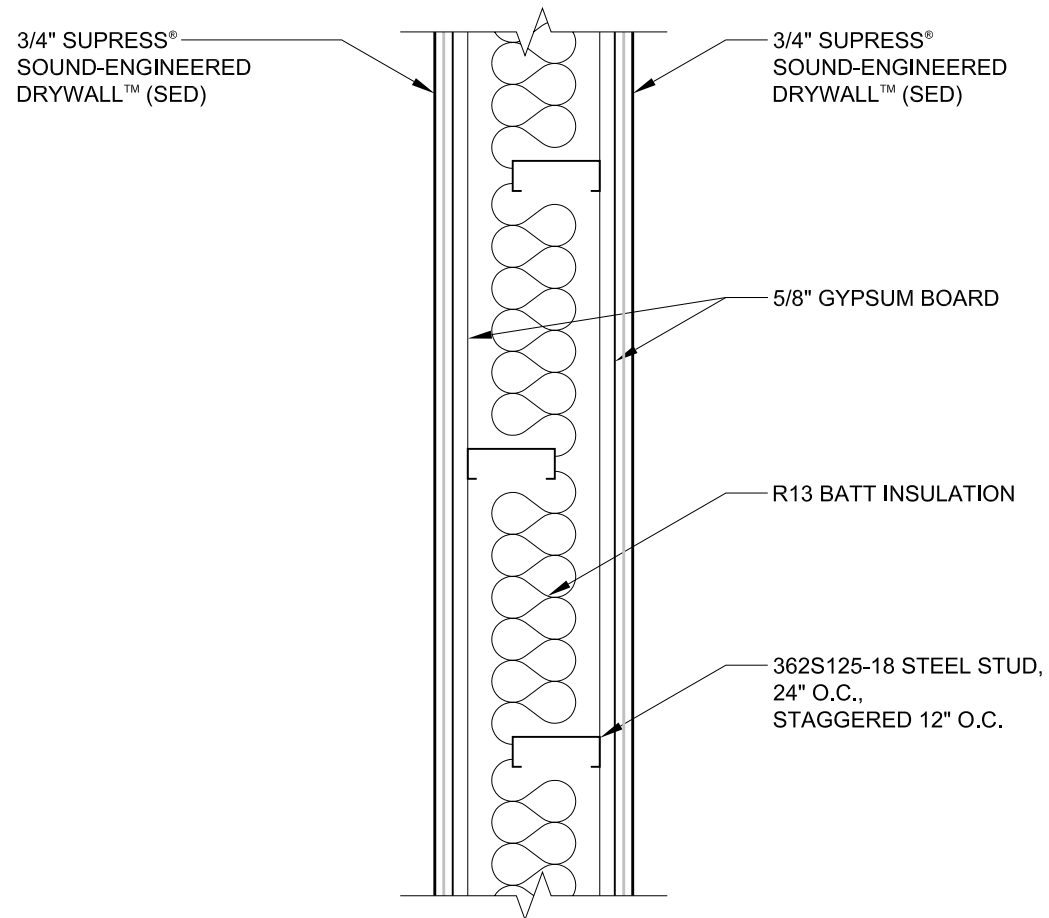

REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 65
 FIRE RATING: 2 HOUR

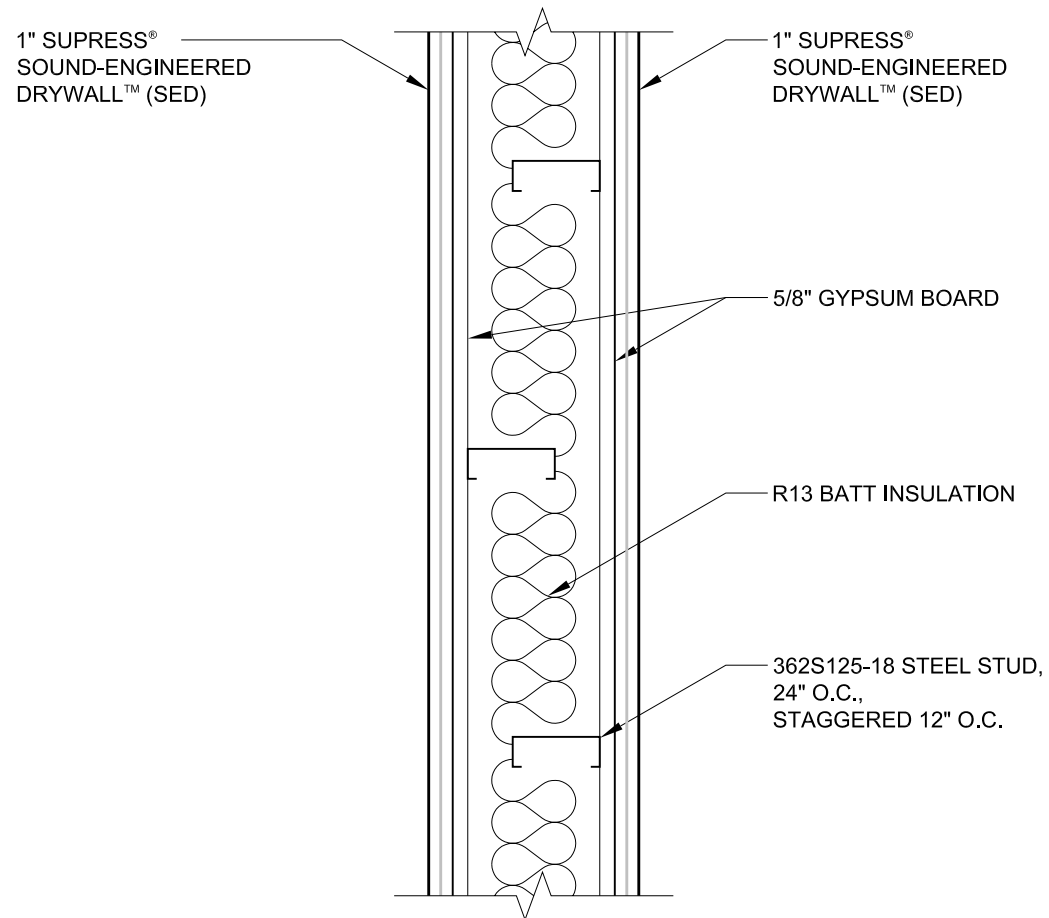

REMODEL CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES

STC: 68

FIRE RATING: 2 HOUR