



REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 51
FIRE RATING: 1 HOUR

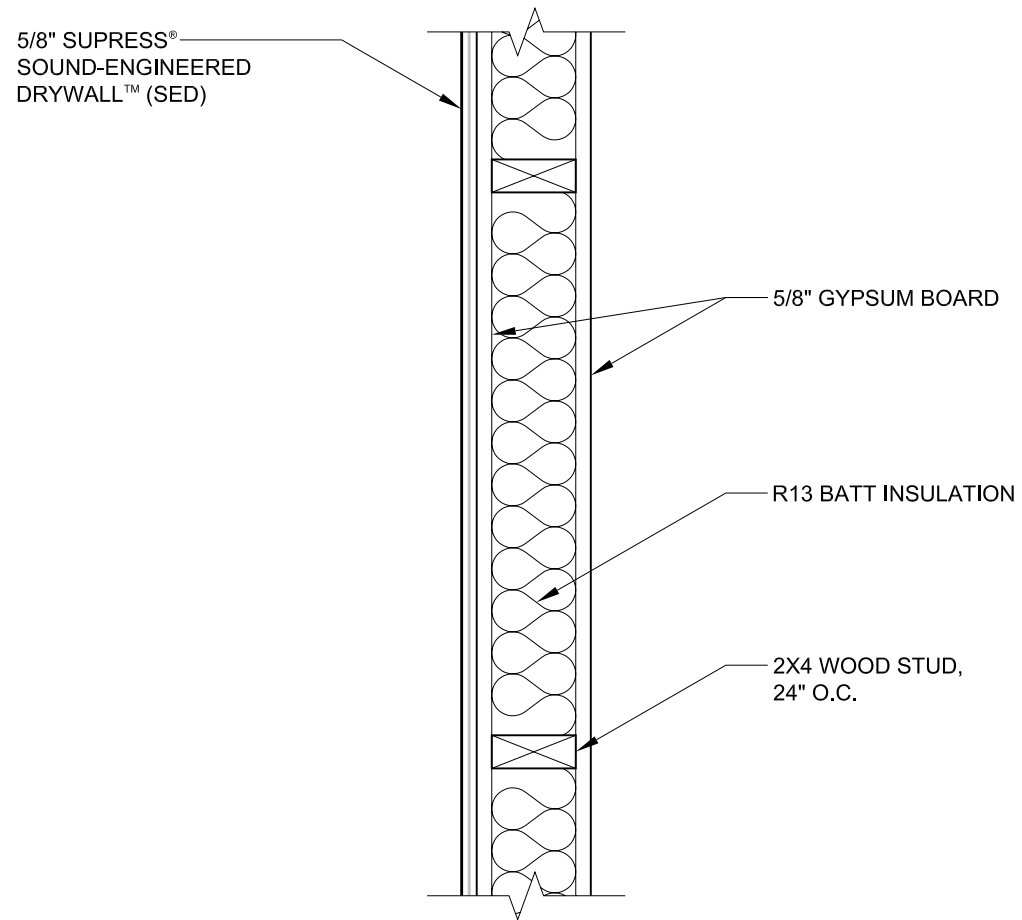


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 53
FIRE RATING: 1 HOUR

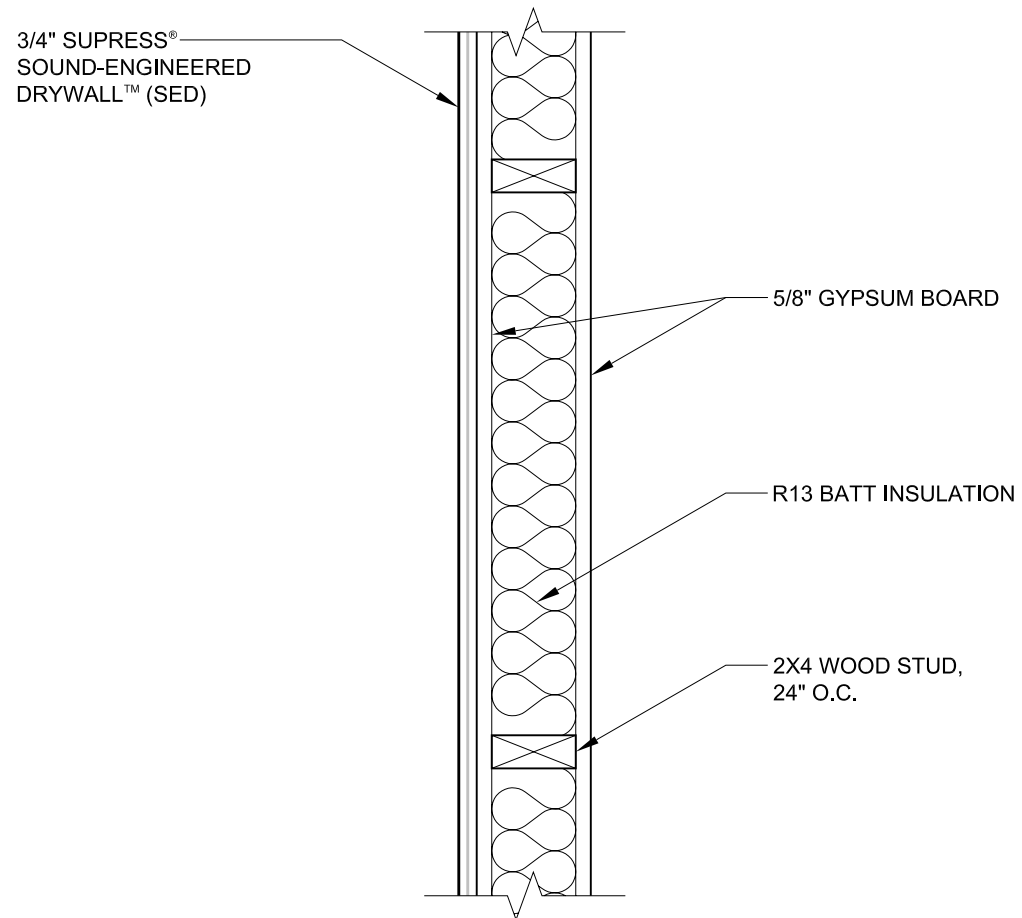


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 55
FIRE RATING: 1 HOUR

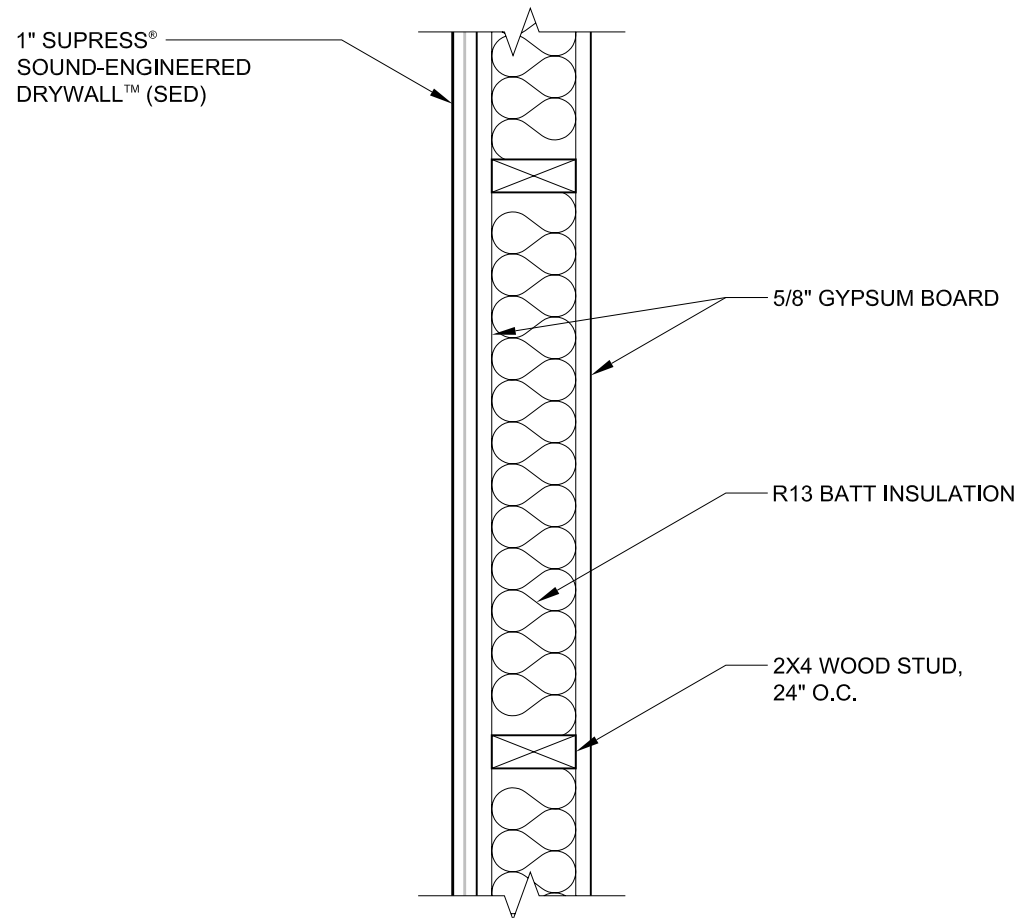


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 56
FIRE RATING: 1 HOUR

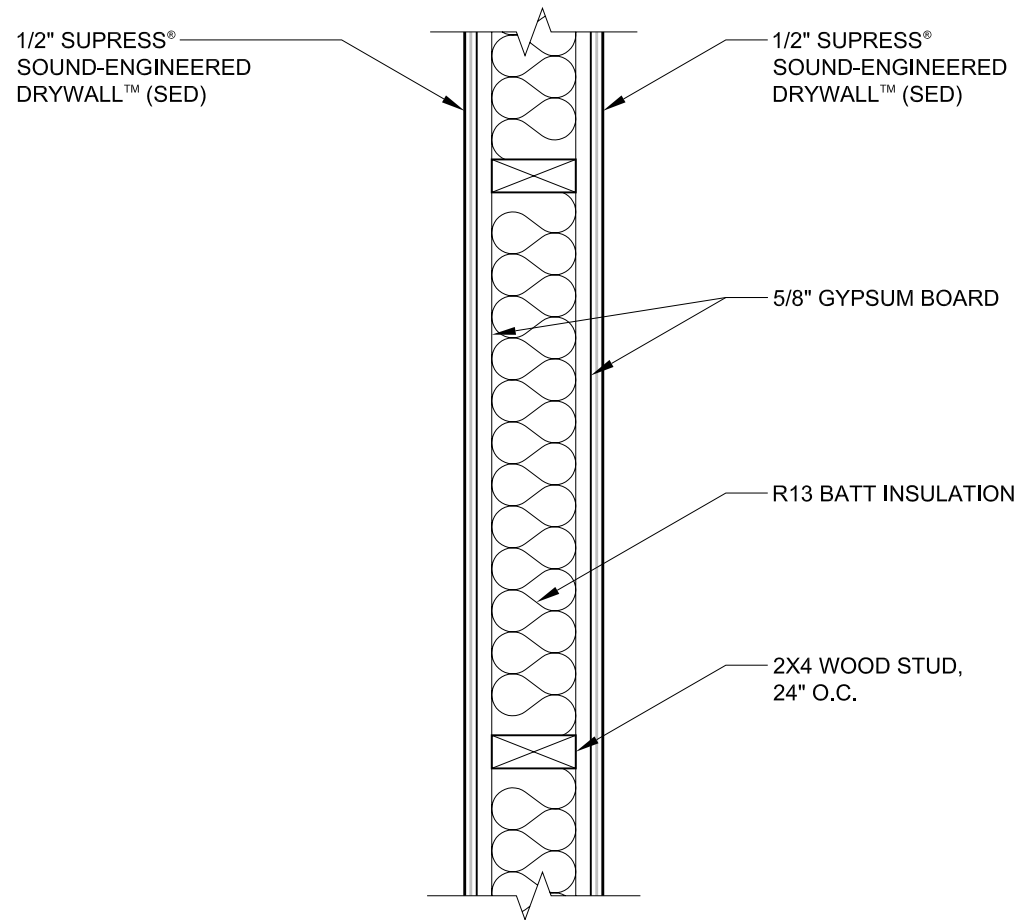


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 53
FIRE RATING: 2 HOUR

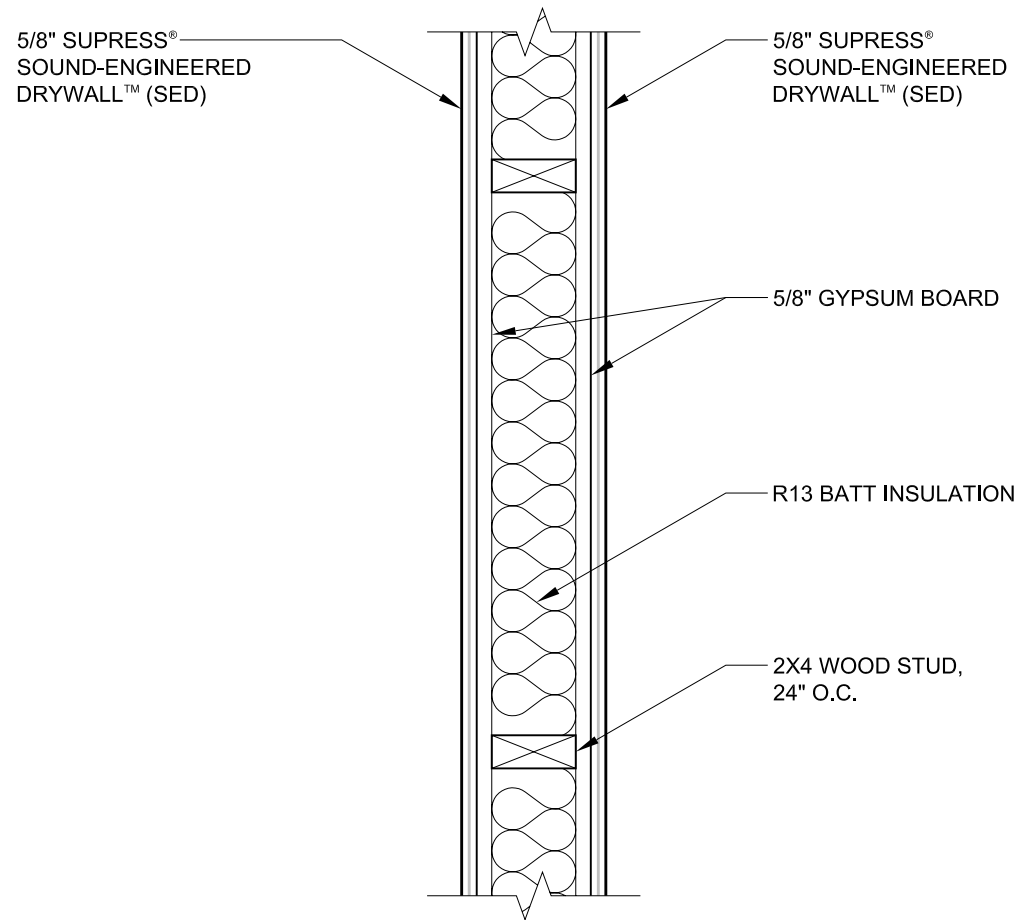


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 55
 FIRE RATING: 2 HOUR

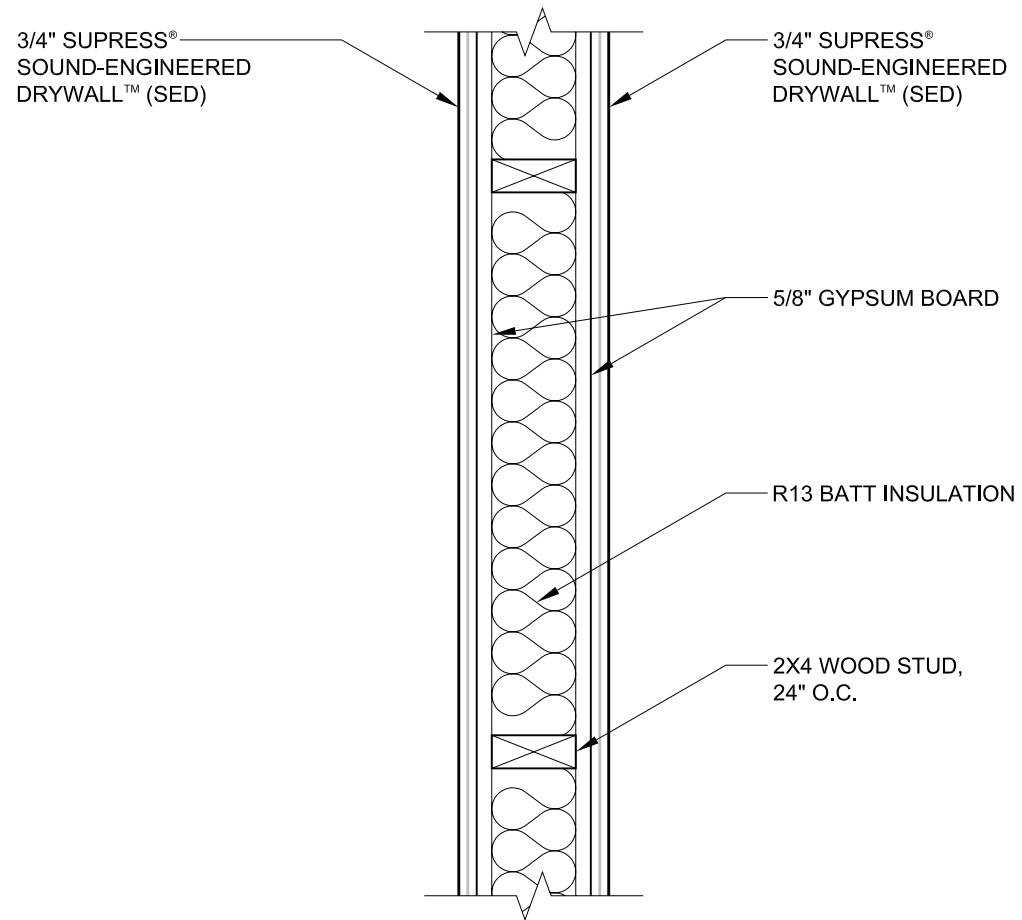

REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 57
 FIRE RATING: 2 HOUR

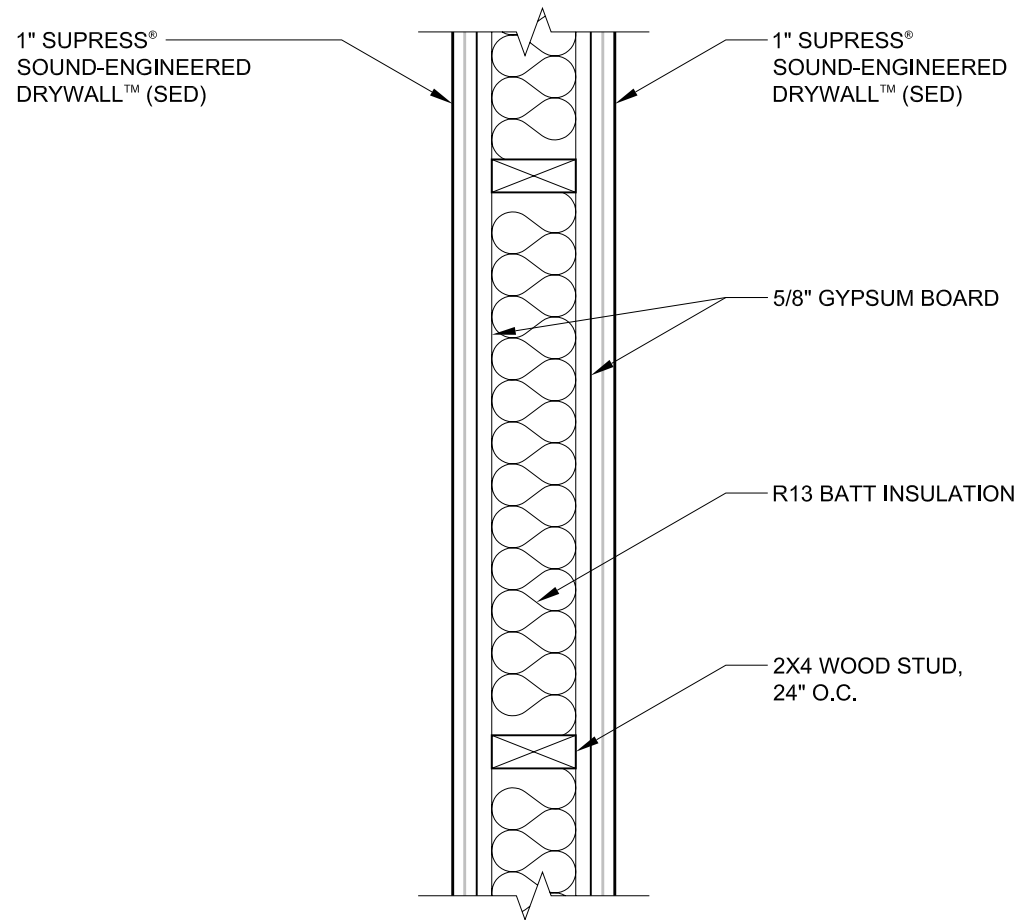

REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES

STC: 60+

FIRE RATING: 2 HOUR