



REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 57
FIRE RATING: 1 HOUR

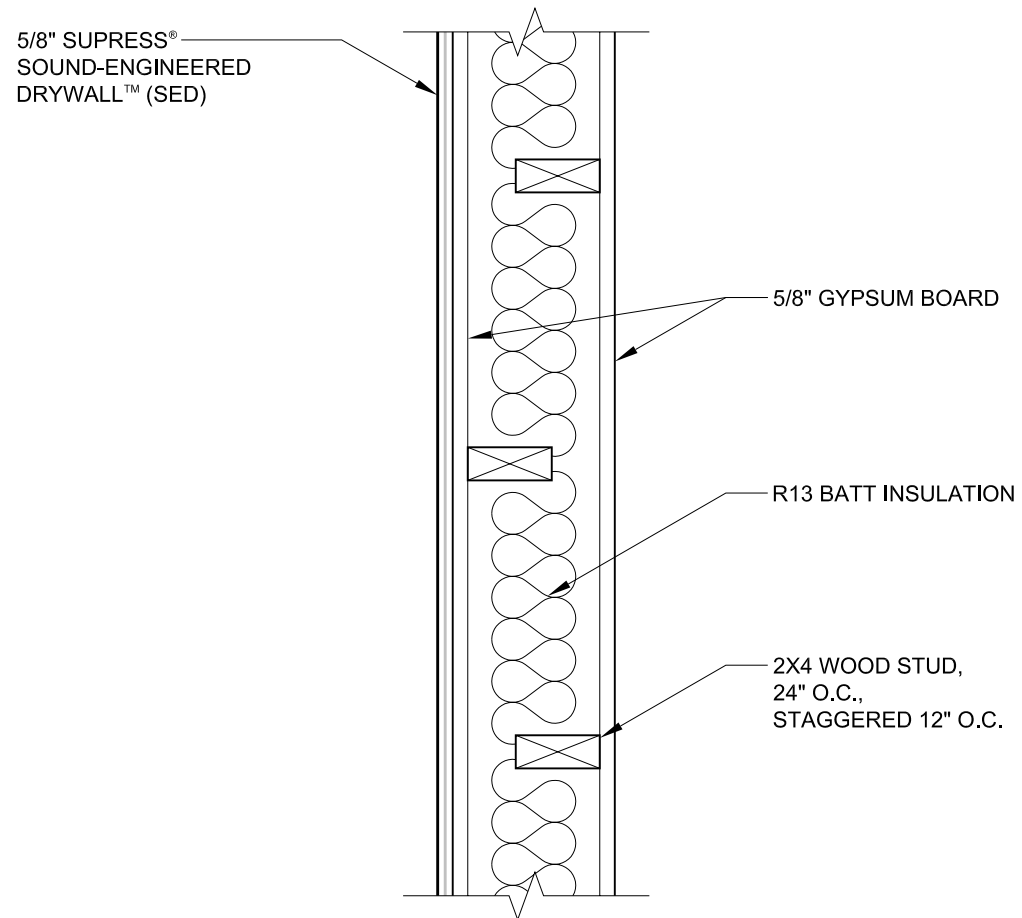


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
STC: 59
FIRE RATING: 1 HOUR

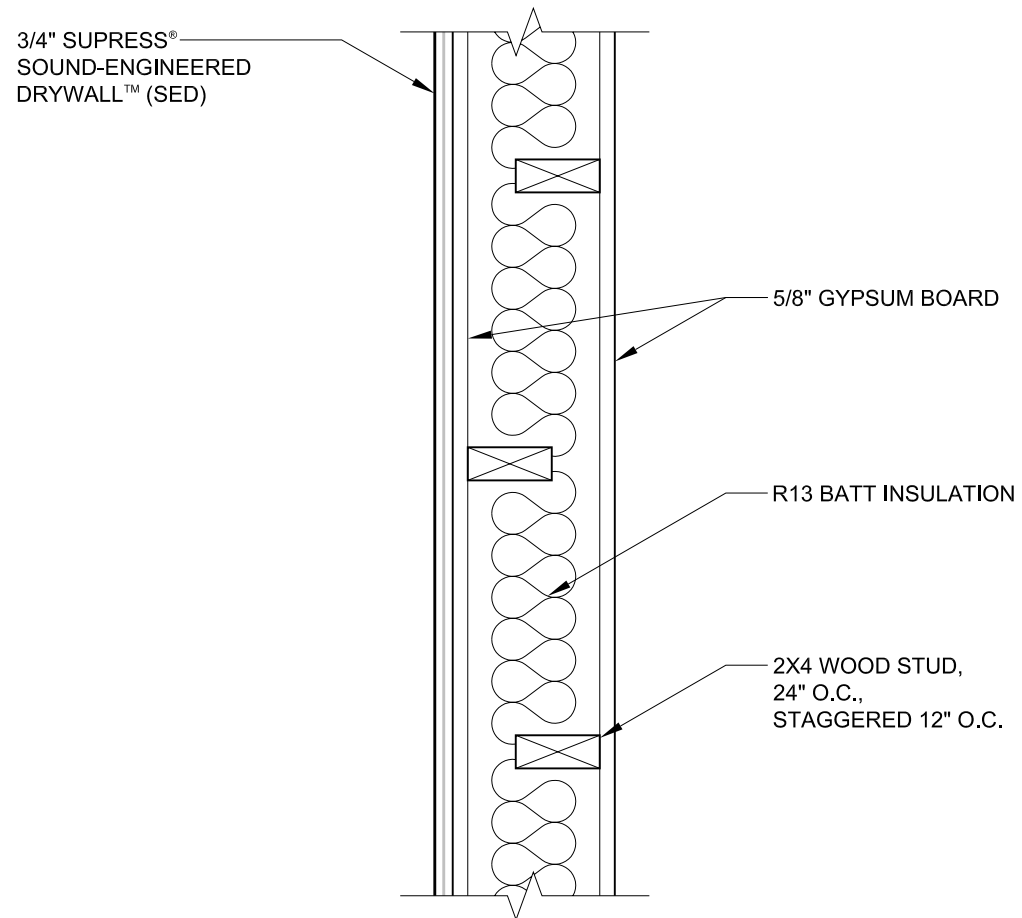

REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 61
 FIRE RATING: 1 HOUR

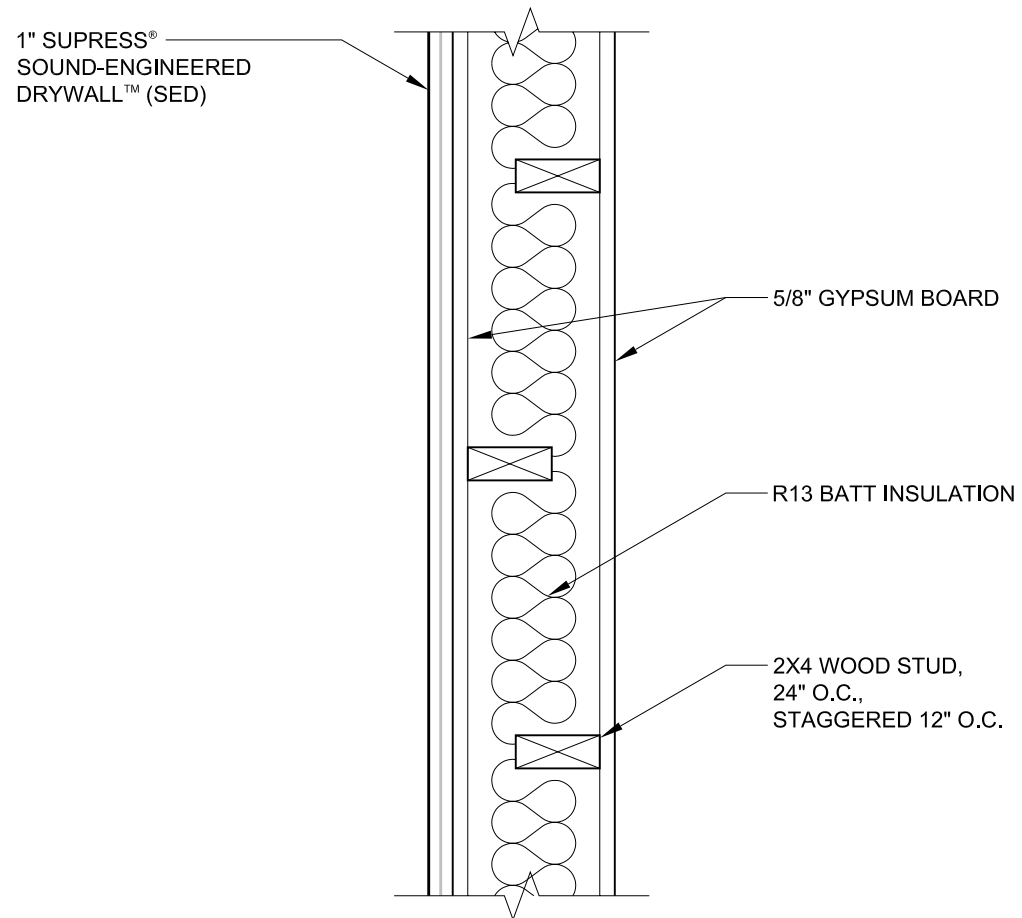


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES


STC: 63

FIRE RATING: 1 HOUR

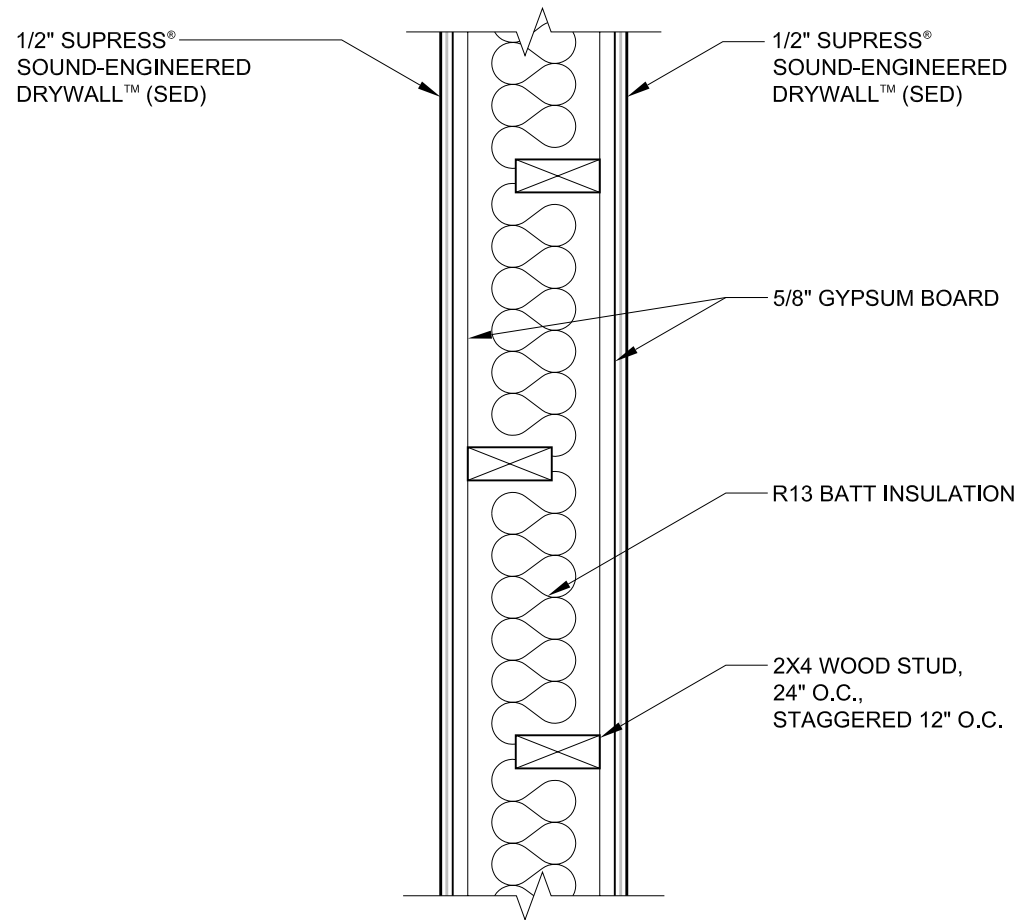

REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 59
 FIRE RATING: 2 HOUR

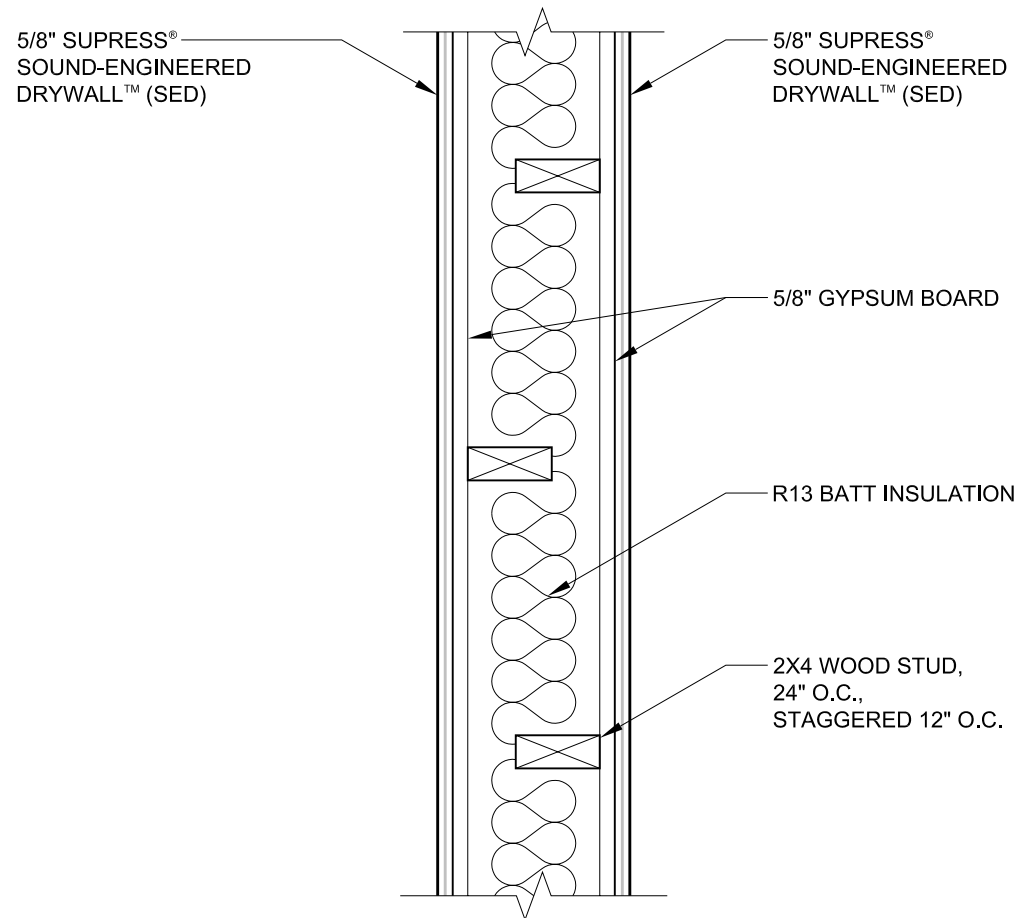


REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES


STC: 61

FIRE RATING: 2 HOUR

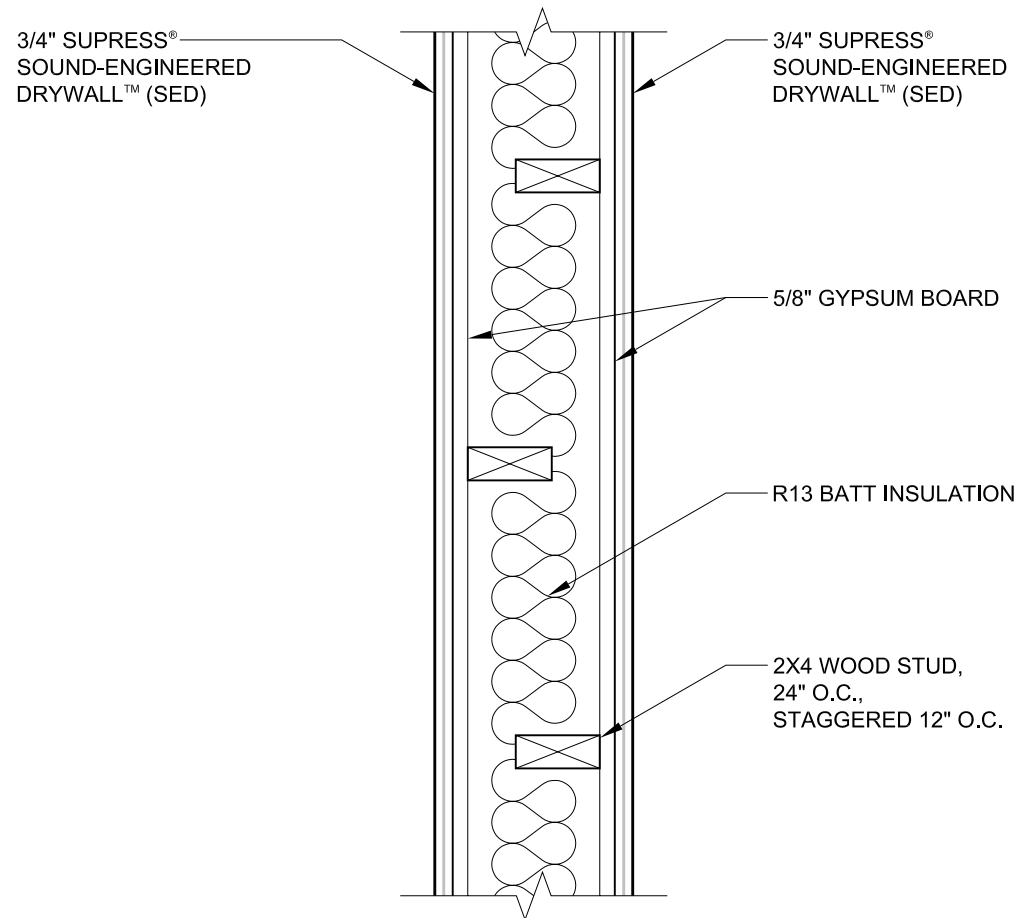

REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES
 DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES
 STC: 63
 FIRE RATING: 2 HOUR

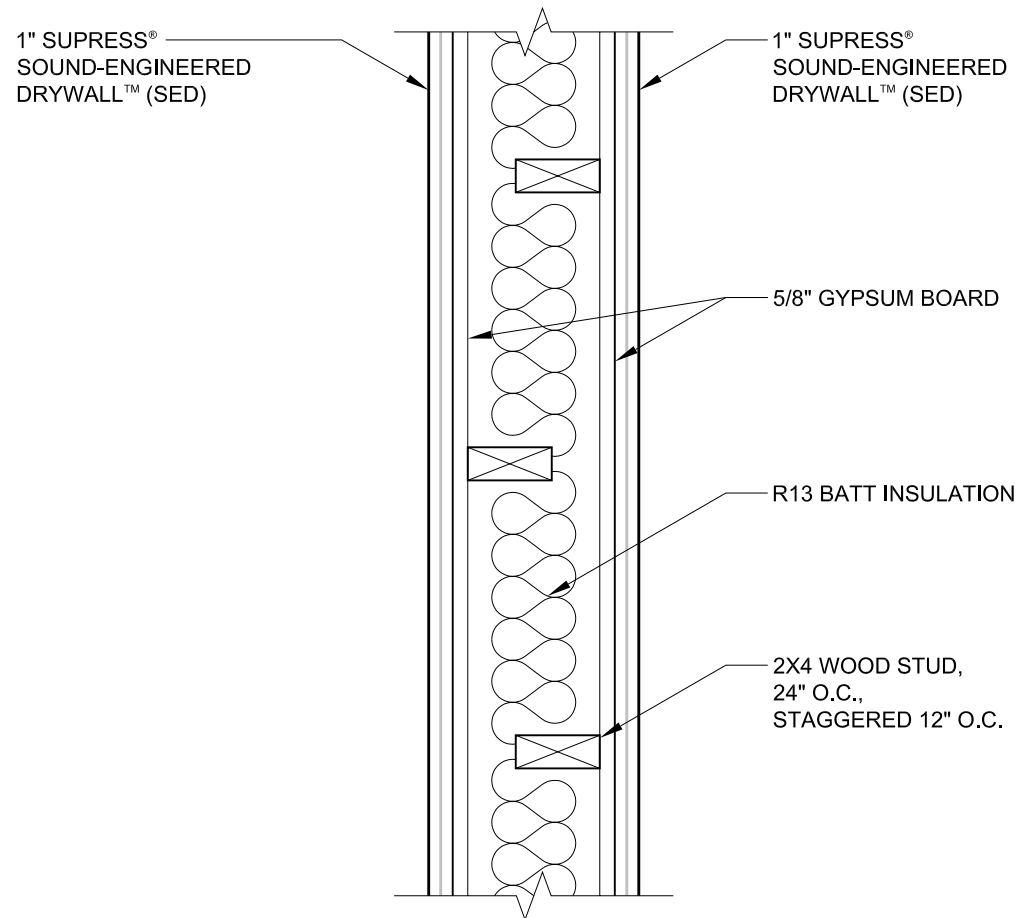

REMODEL CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: SINGLE 5/8" LAYER, BOTH SIDES

STC: 65

FIRE RATING: 2 HOUR