


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE


STC: 50

FIRE RATING: 1 HOUR

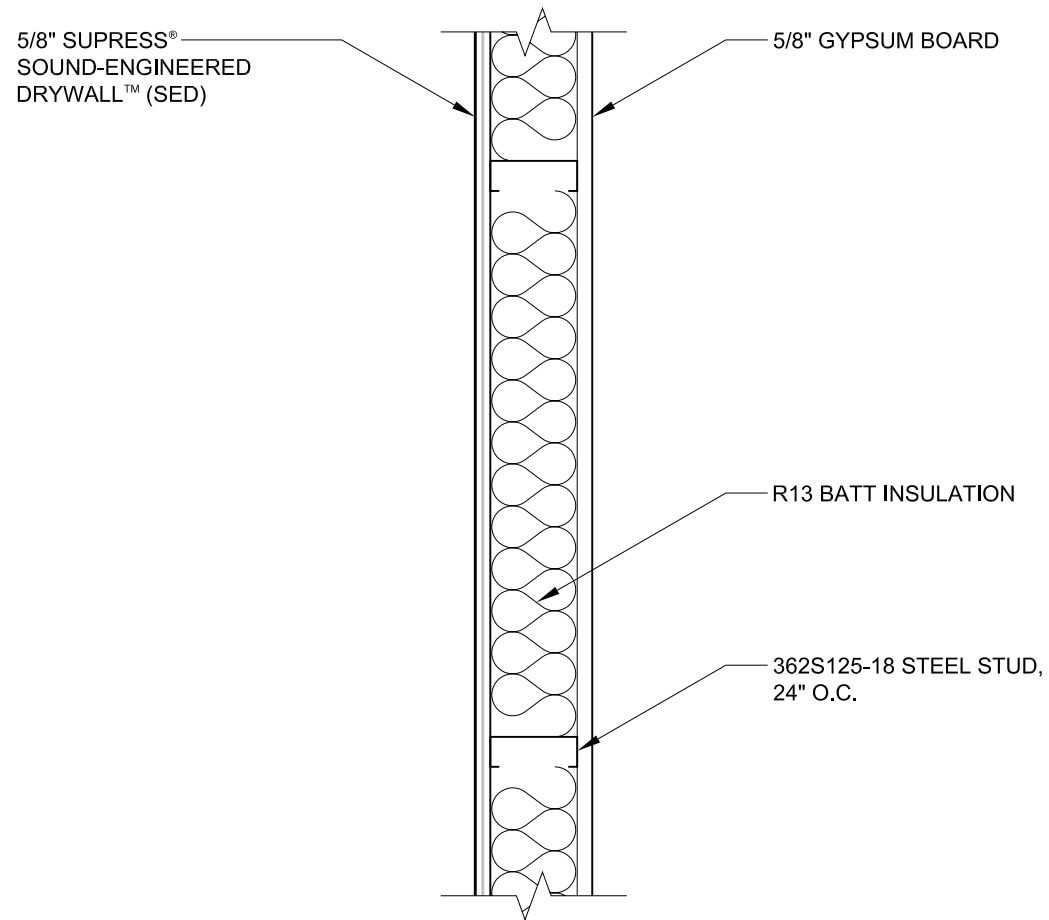

NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE
STC: 53
FIRE RATING: 1 HOUR

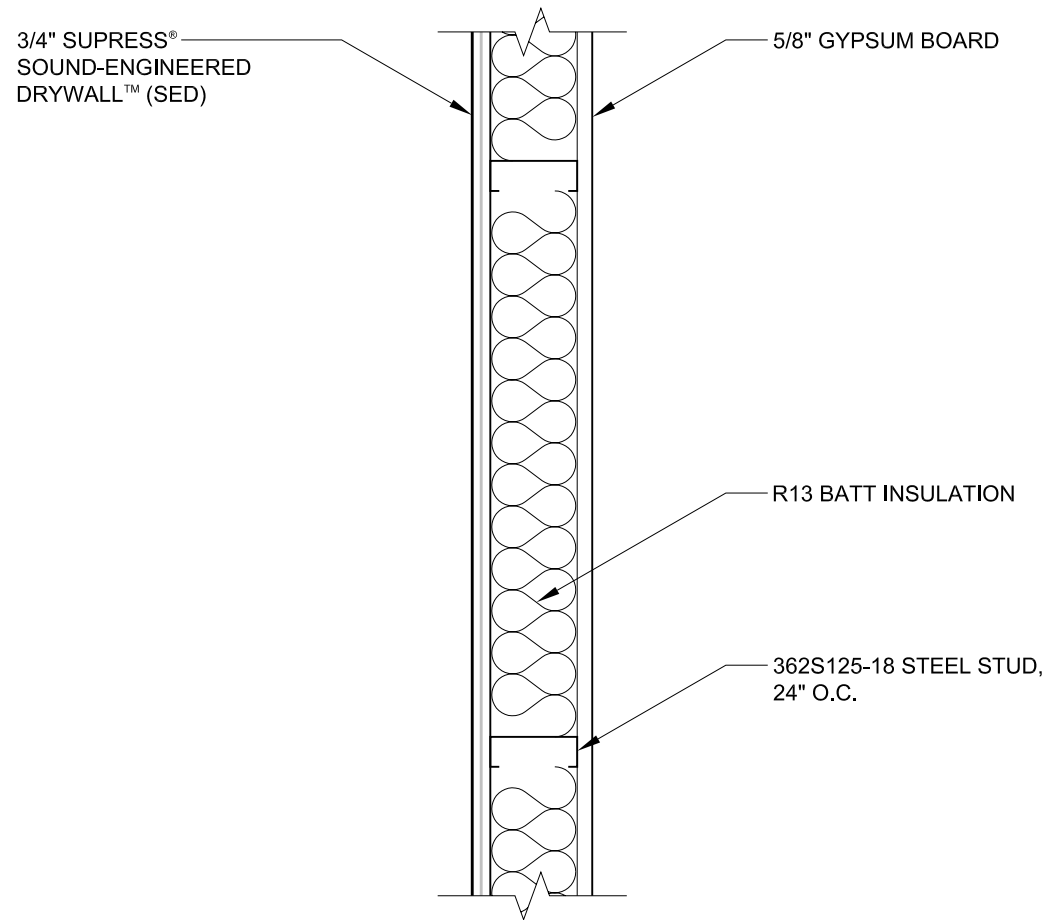


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 55

FIRE RATING: 1 HOUR

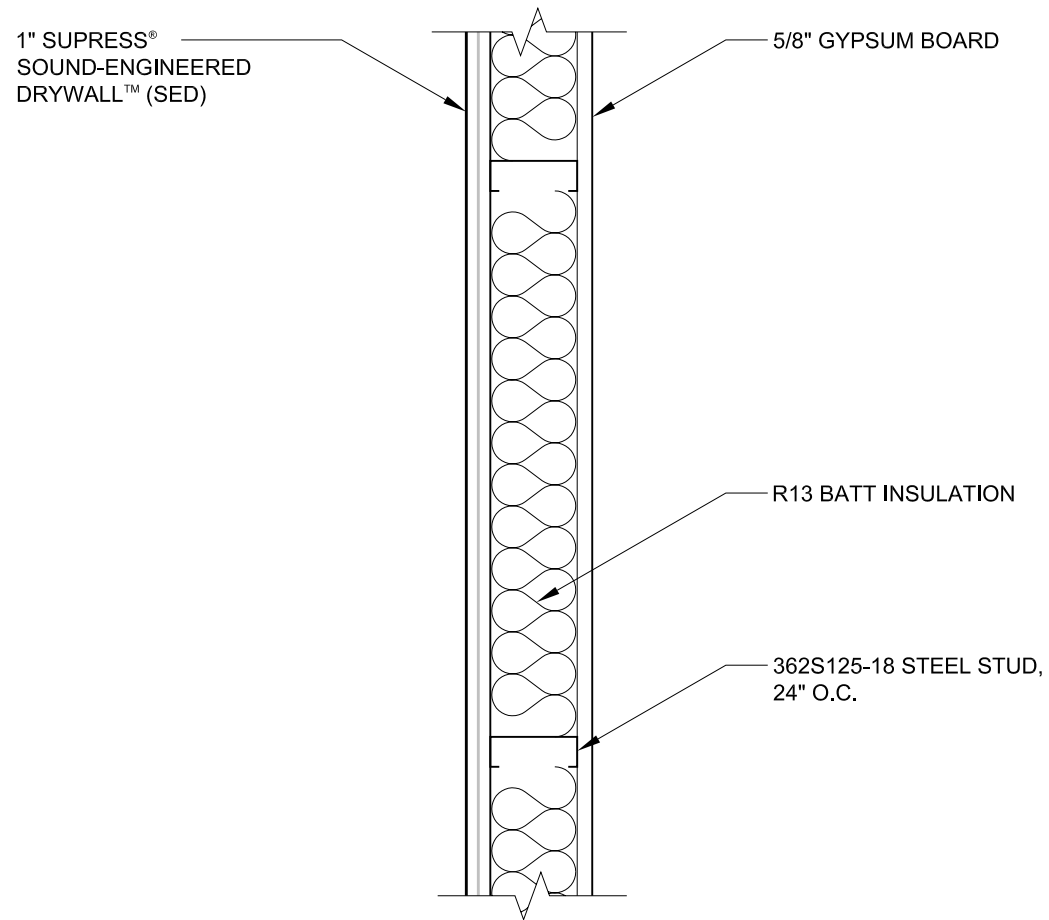


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 57

FIRE RATING: 1 HOUR

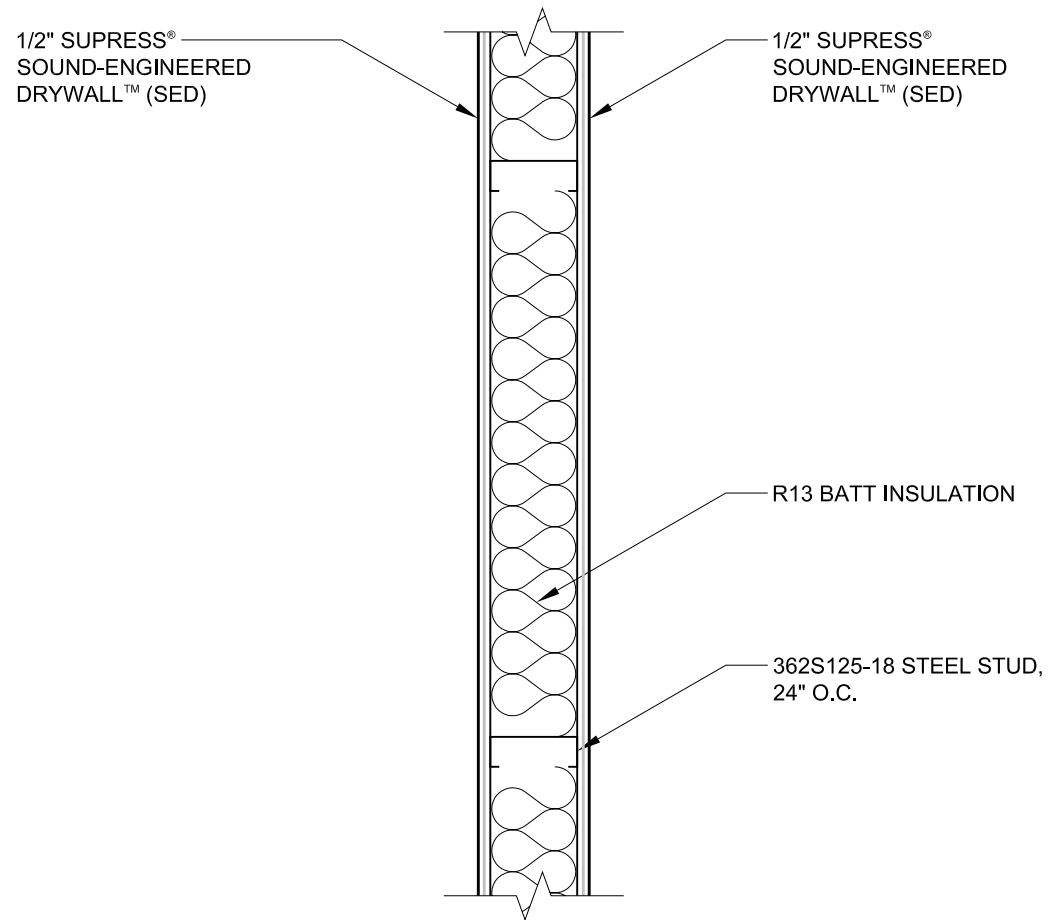


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 53

FIRE RATING: 1 HOUR

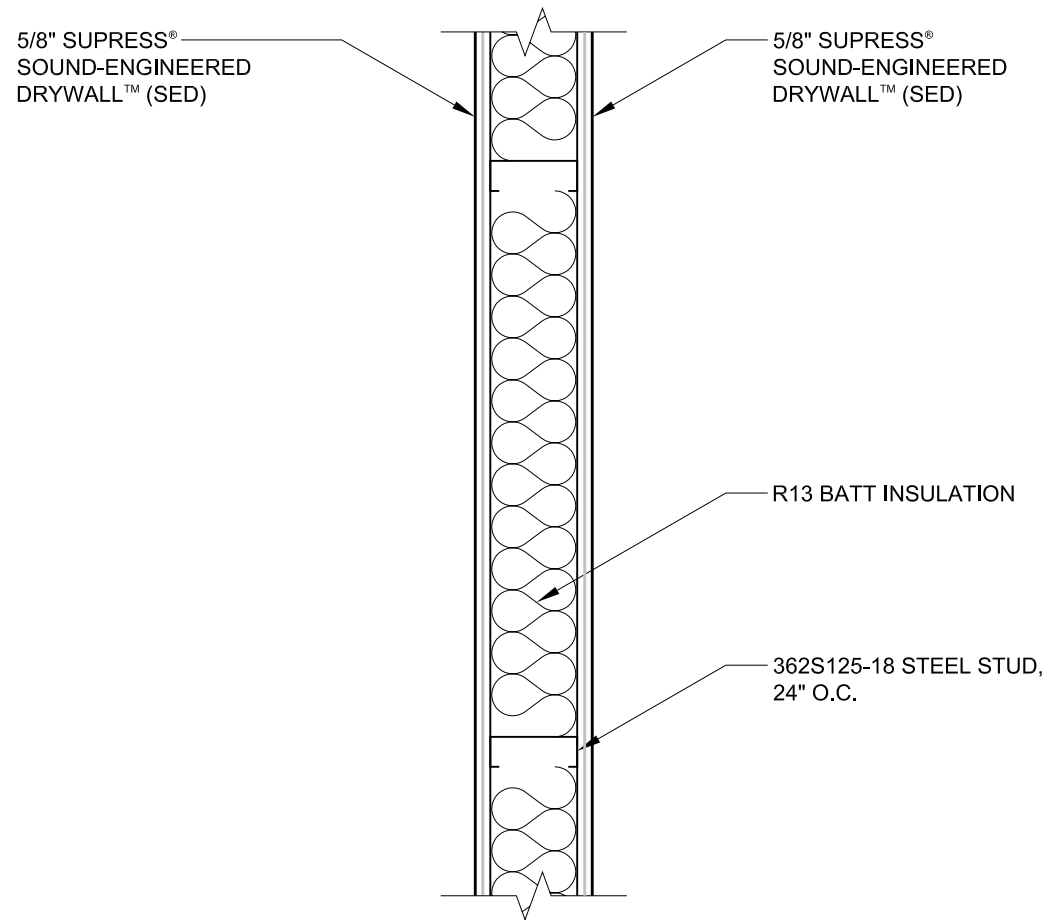


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 55

FIRE RATING: 1 HOUR

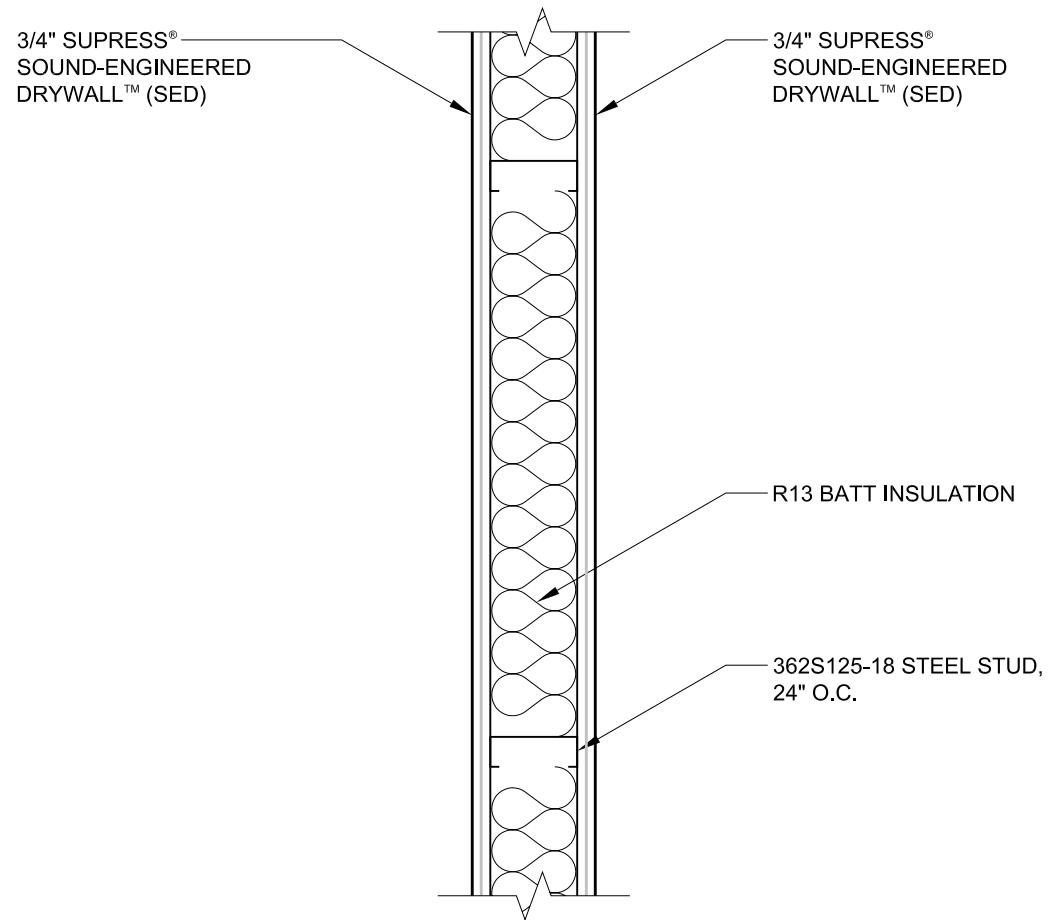


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 57

FIRE RATING: 1 HOUR

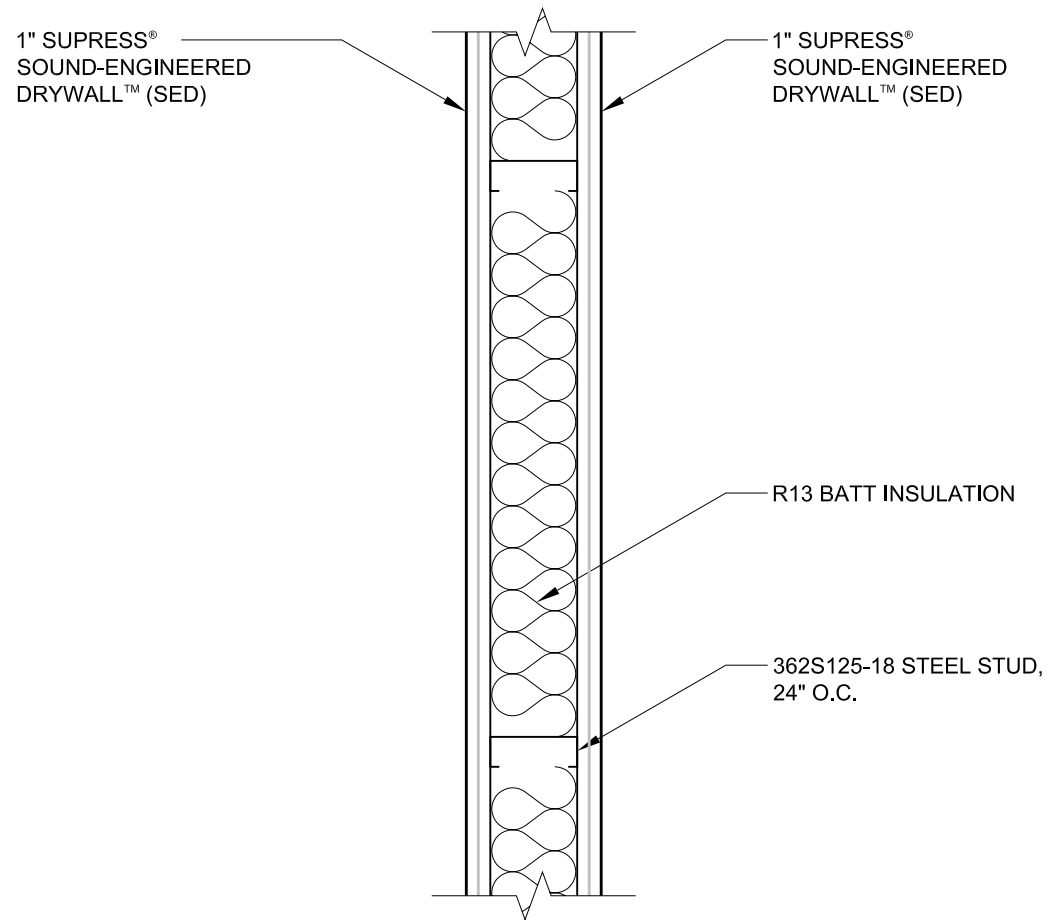

NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 60

FIRE RATING: 1 HOUR