


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE
 DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE
 STC: 50
 FIRE RATING: 1 HOUR

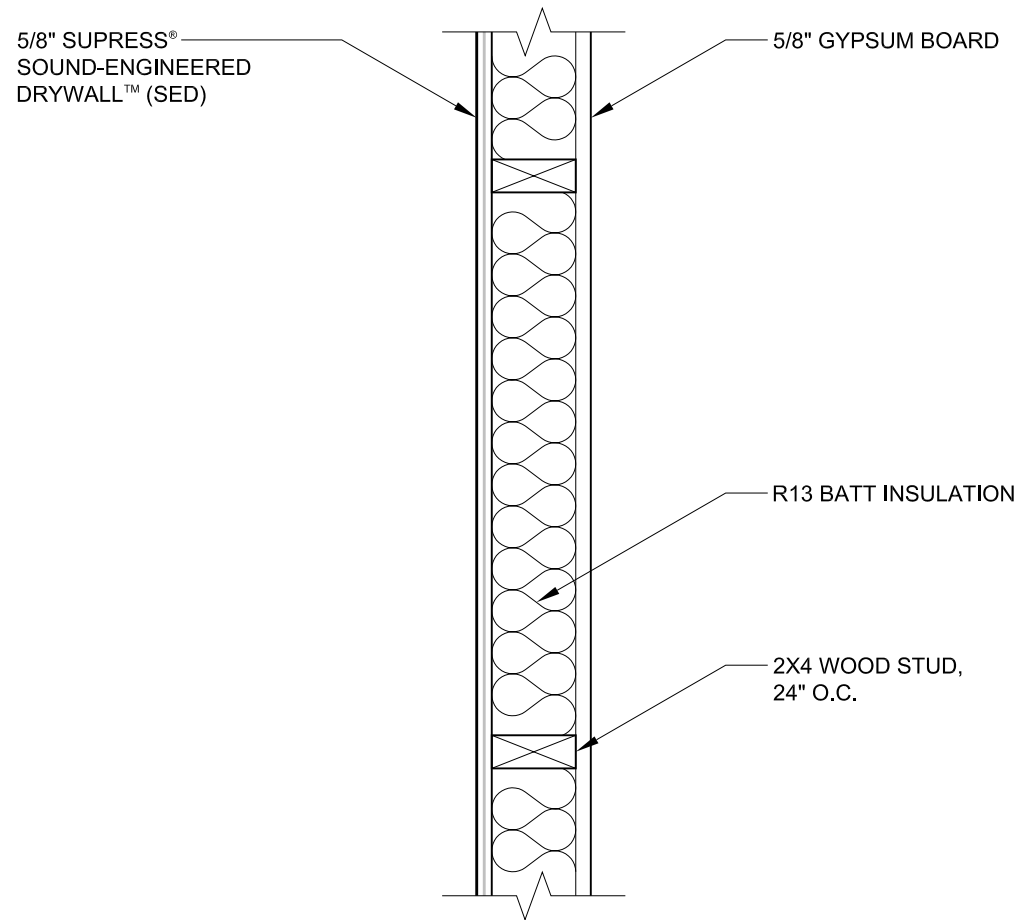


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 52

FIRE RATING: 1 HOUR

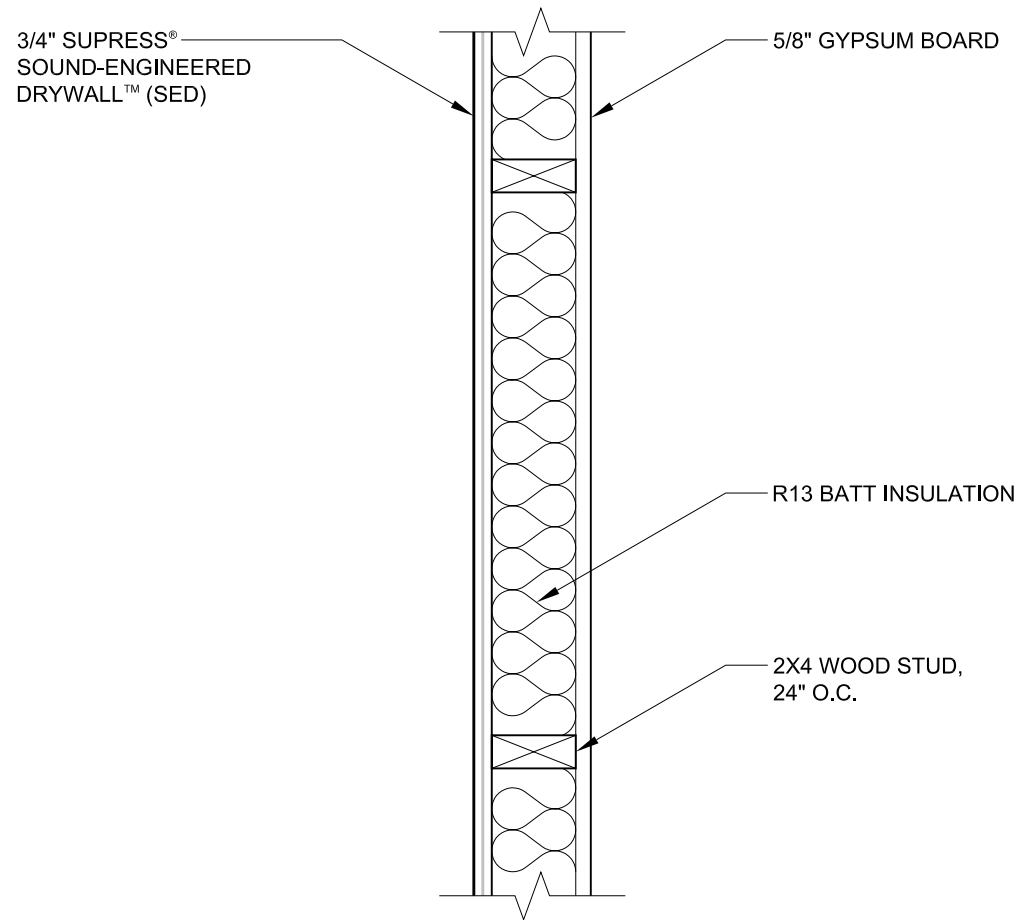


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE


STC: 54

FIRE RATING: 1 HOUR

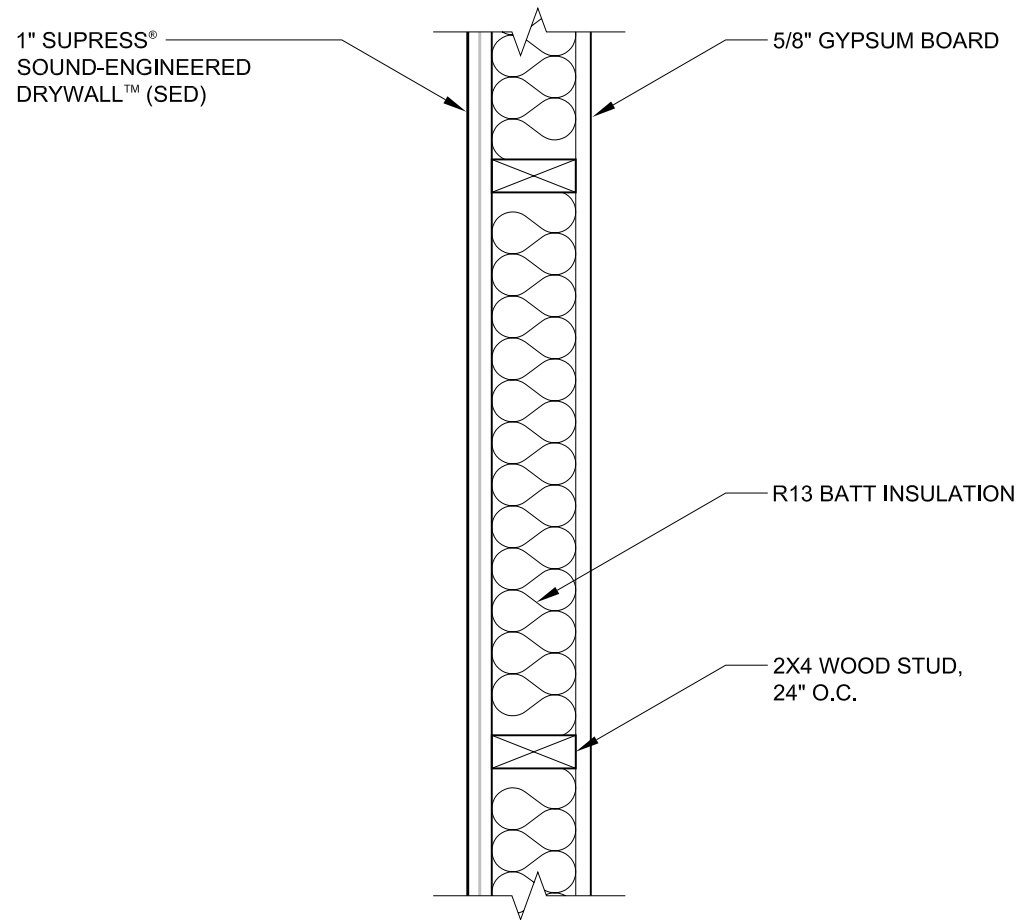


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE
DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE
STC: 56
FIRE RATING: 1 HOUR

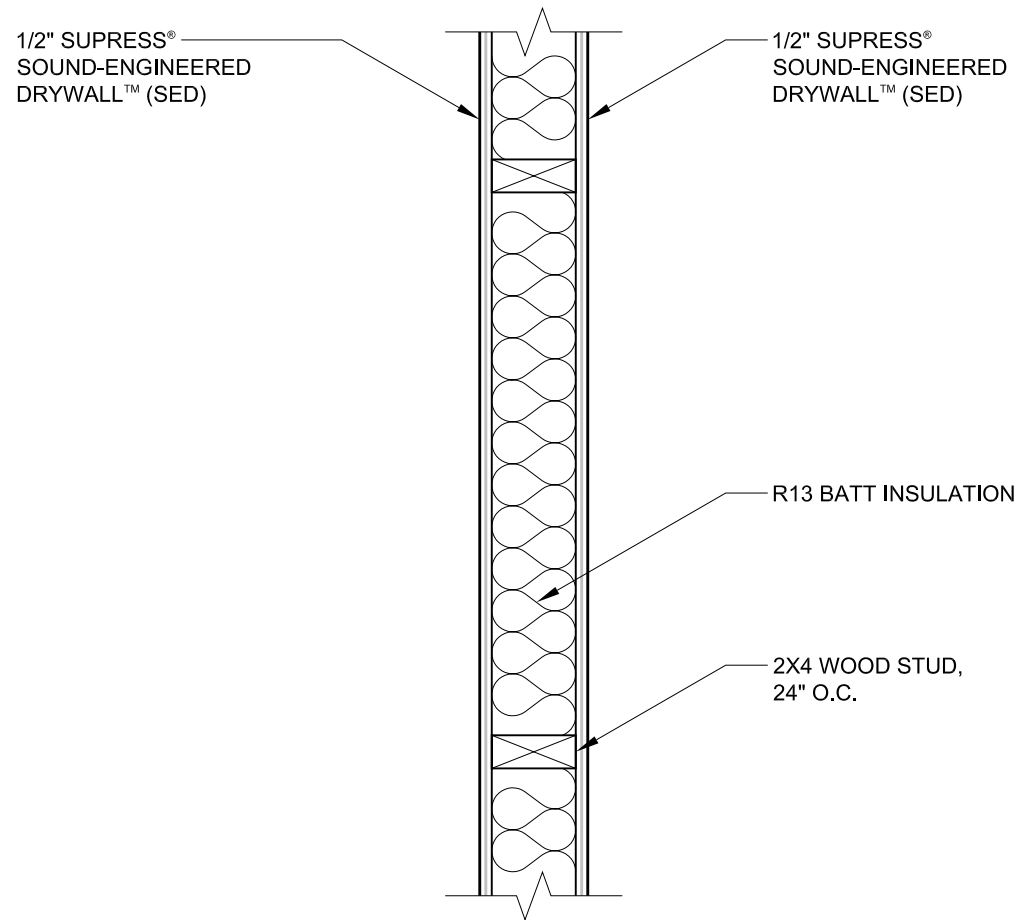

NEW CONSTRUCTION - WOOD STUDS

SUPRESS[®] SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES
DRYWALL LAYER: NONE
STC: 53
FIRE RATING: 1 HOUR

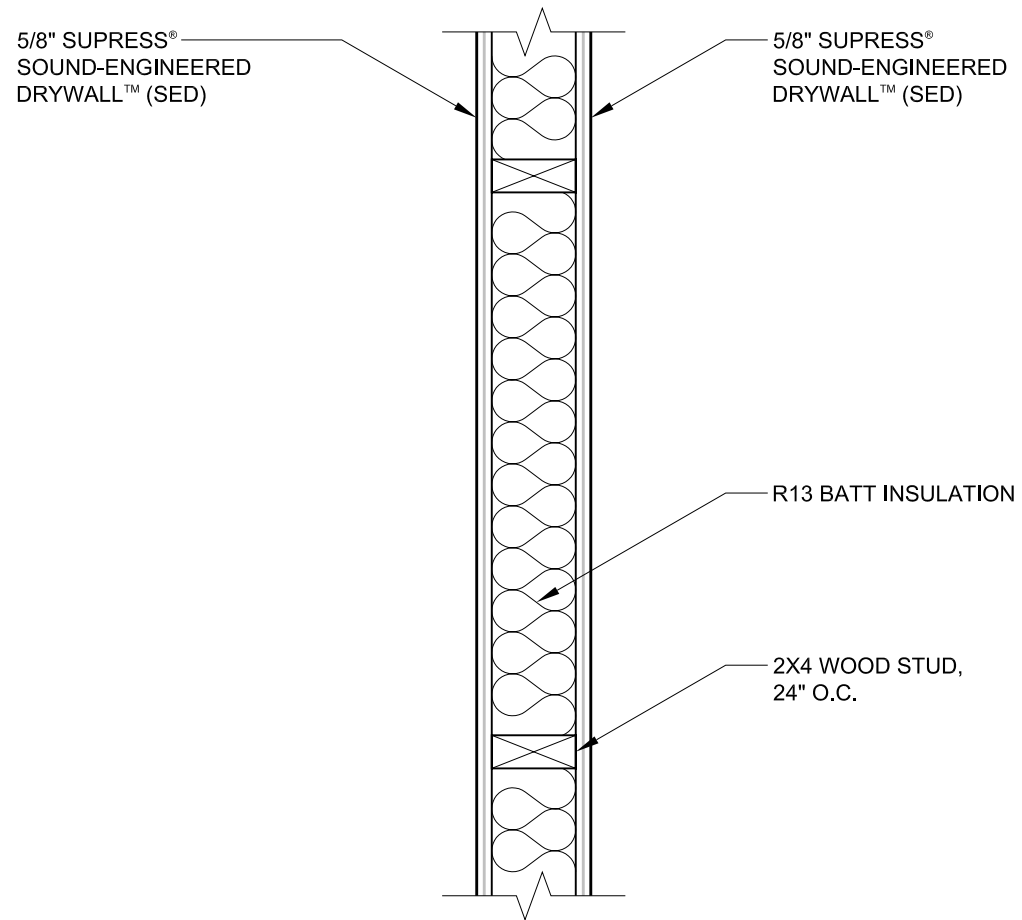


NEW CONSTRUCTION - WOOD STUDS

SUPRESS[®] SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 54

FIRE RATING: 1 HOUR

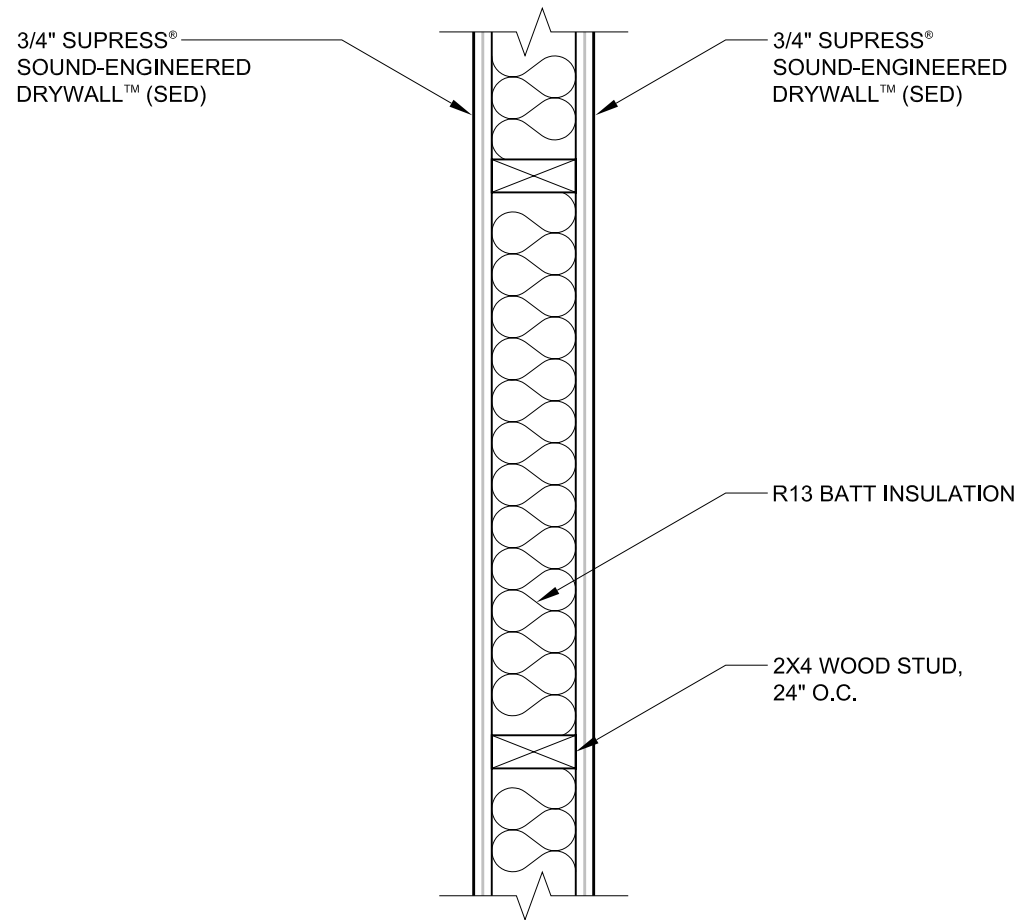


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 56

FIRE RATING: 1 HOUR

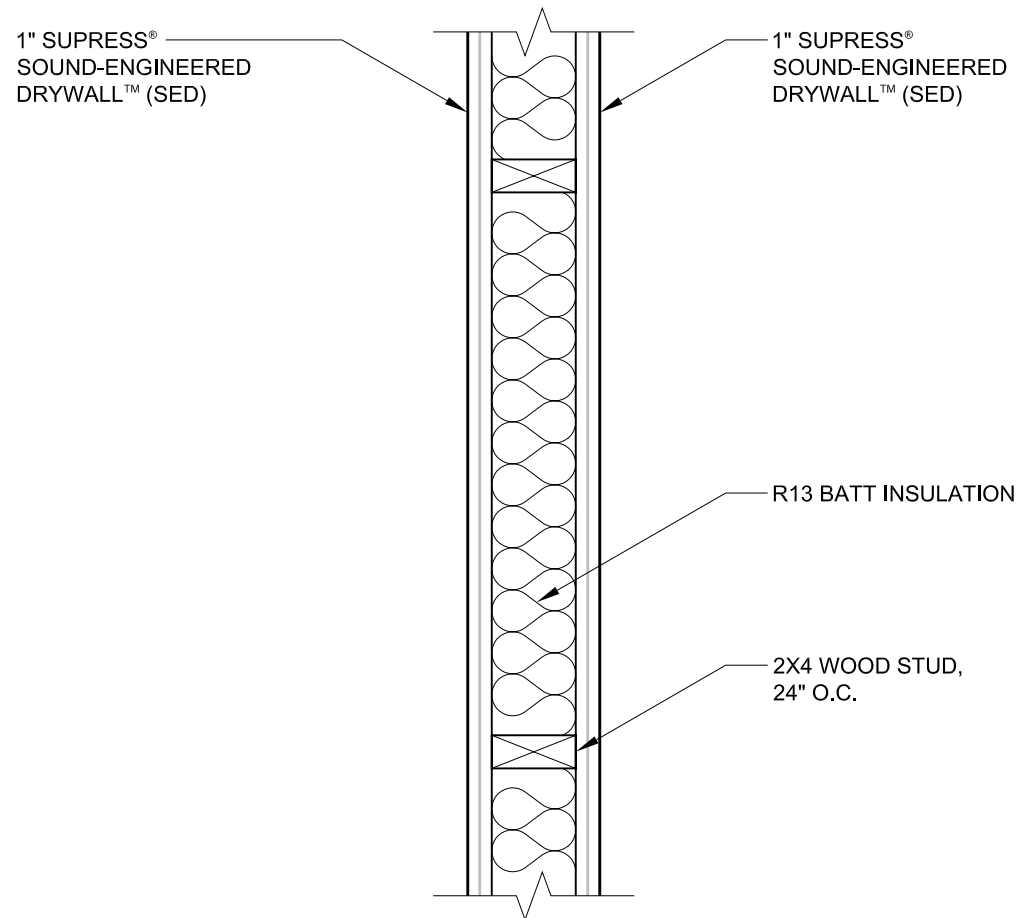

NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 58

FIRE RATING: 2 HOUR