


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 57

FIRE RATING: 1 HOUR

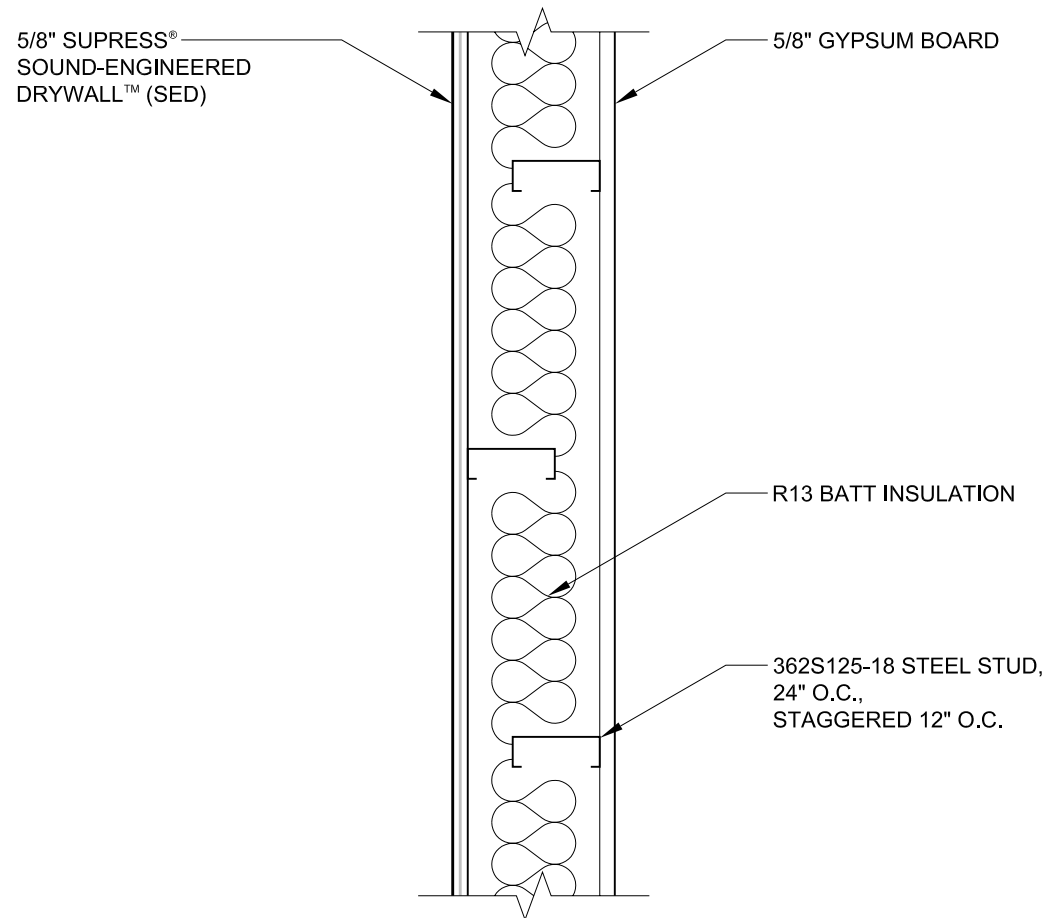


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 59

FIRE RATING: 1 HOUR

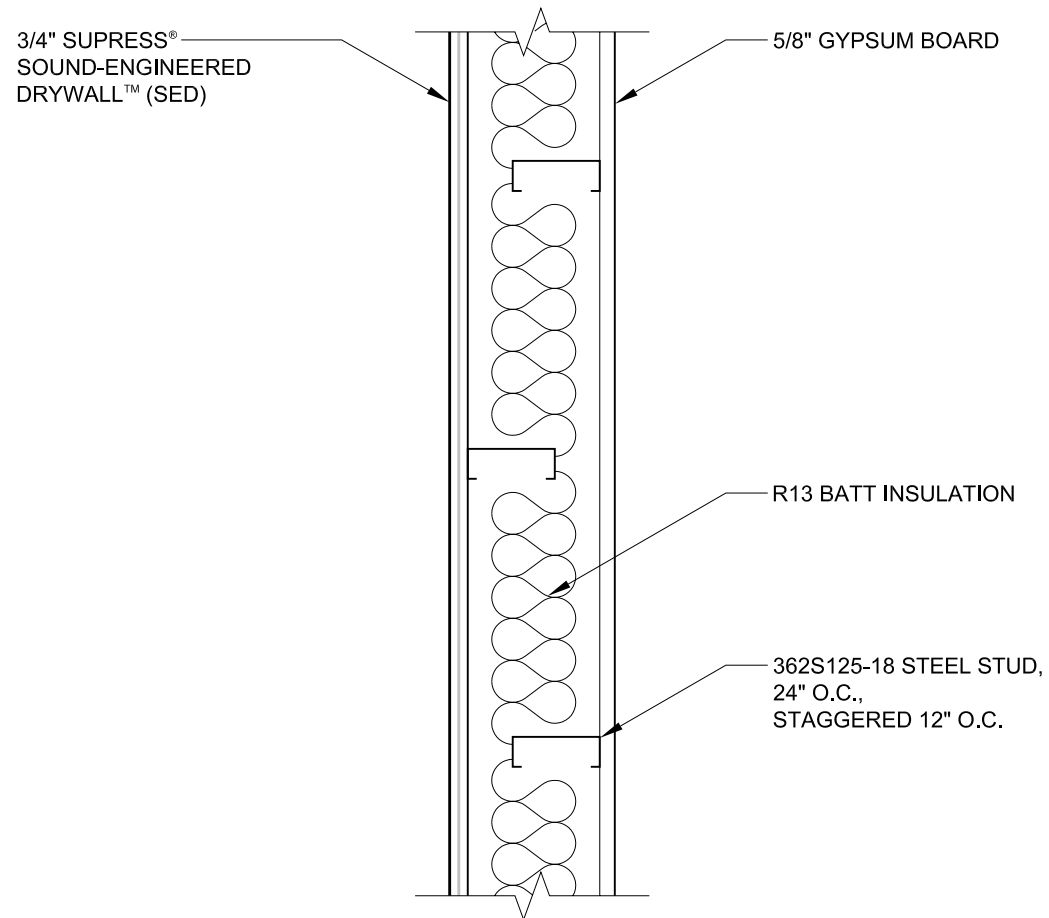


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 62

FIRE RATING: 1 HOUR

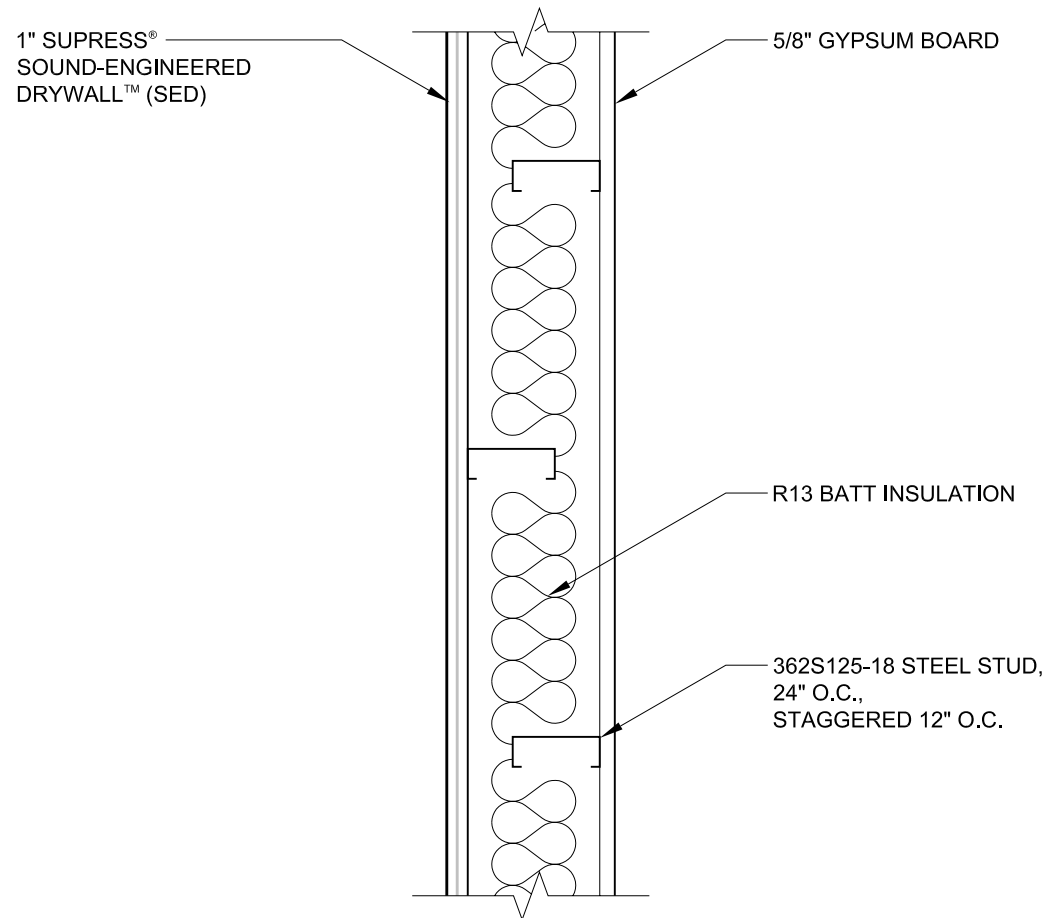


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 64

FIRE RATING: 1 HOUR

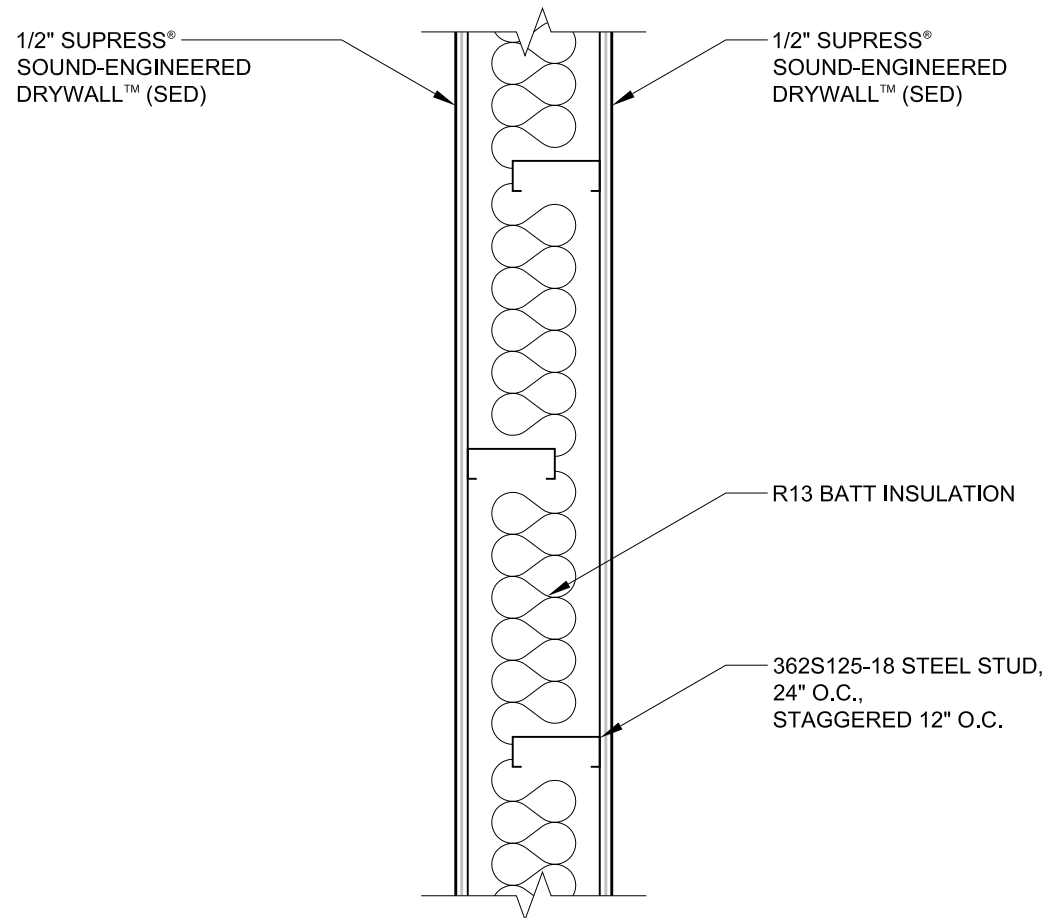


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 59

FIRE RATING: 1 HOUR

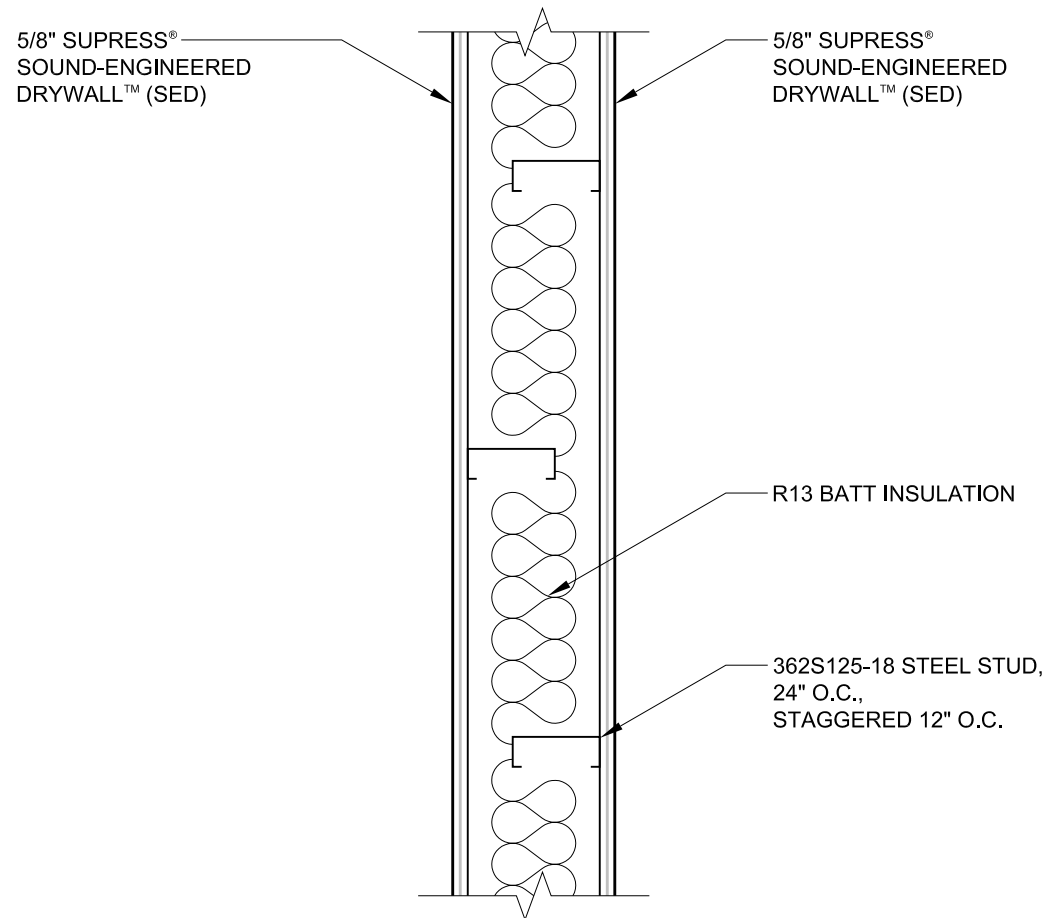


NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES

DRYWALL LAYER: NONE


STC: 61

FIRE RATING: 1 HOUR

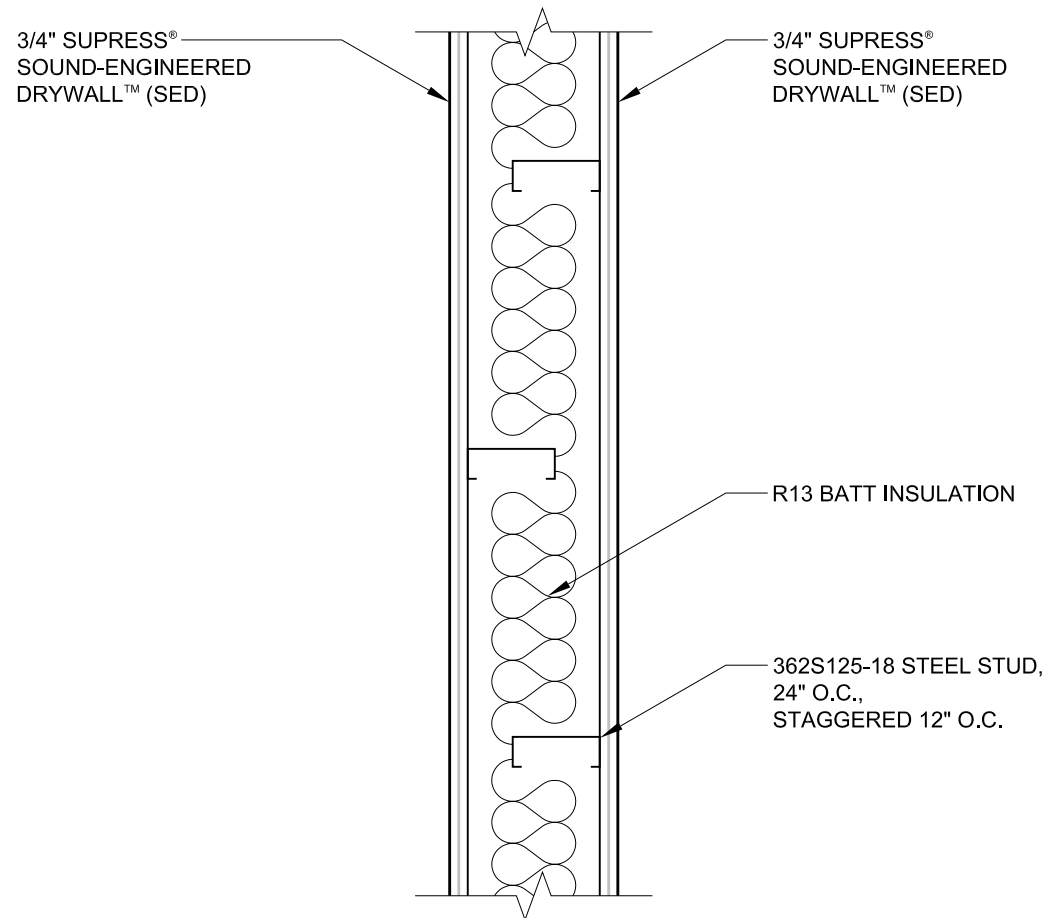

NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES
 DRYWALL LAYER: NONE
 STC: 64
 FIRE RATING: 1 HOUR

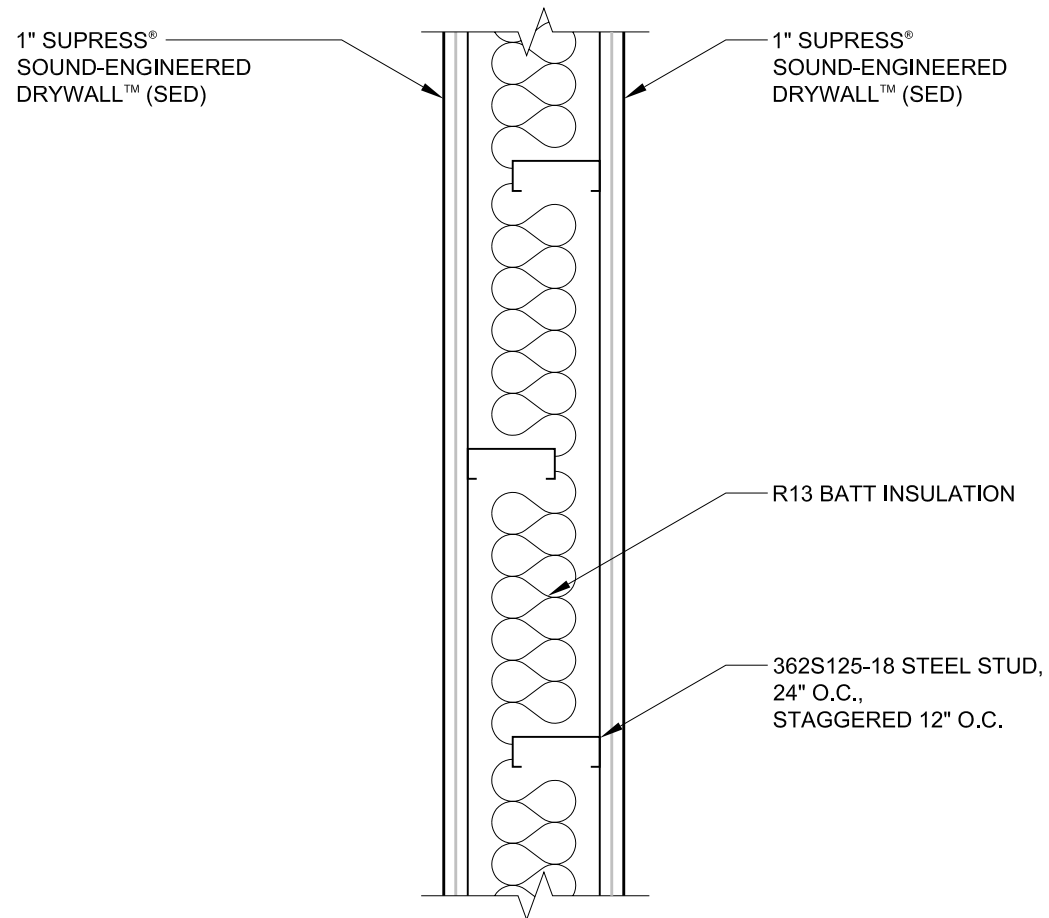

NEW CONSTRUCTION - METAL STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 66

FIRE RATING: 2 HOUR