


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 60

FIRE RATING: 1 HOUR

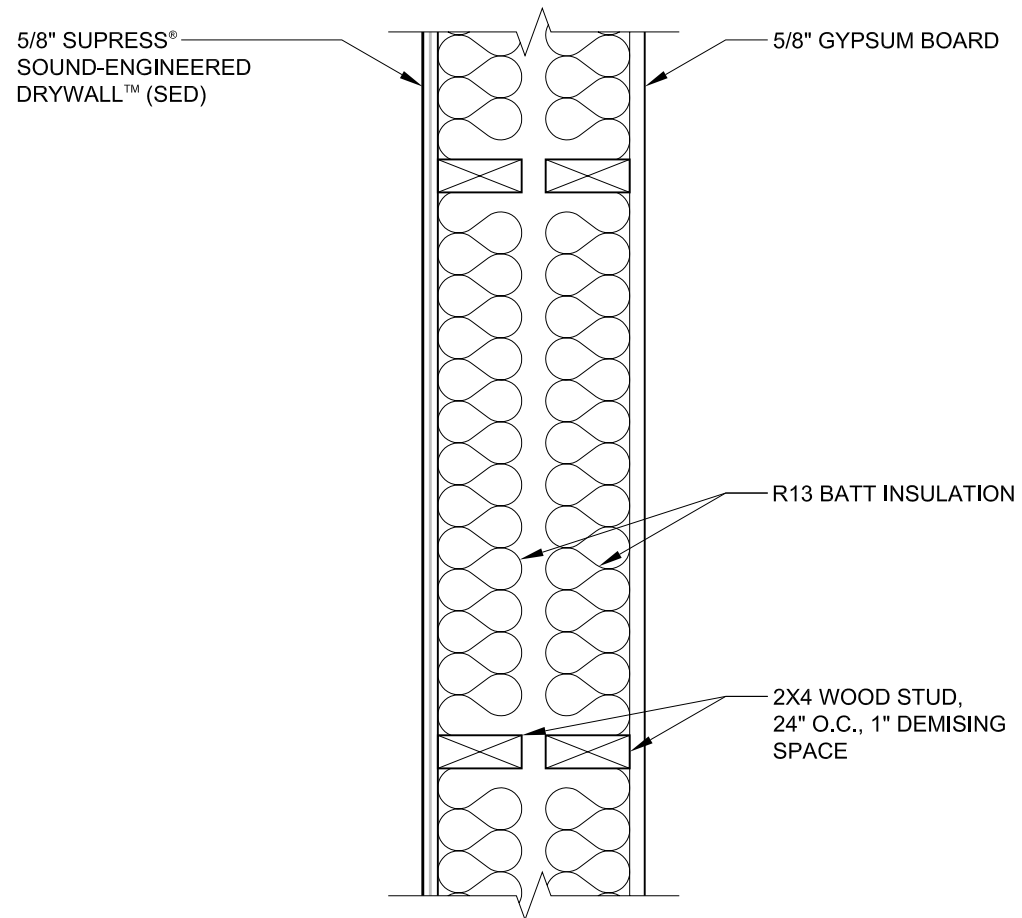


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 62

FIRE RATING: 1 HOUR

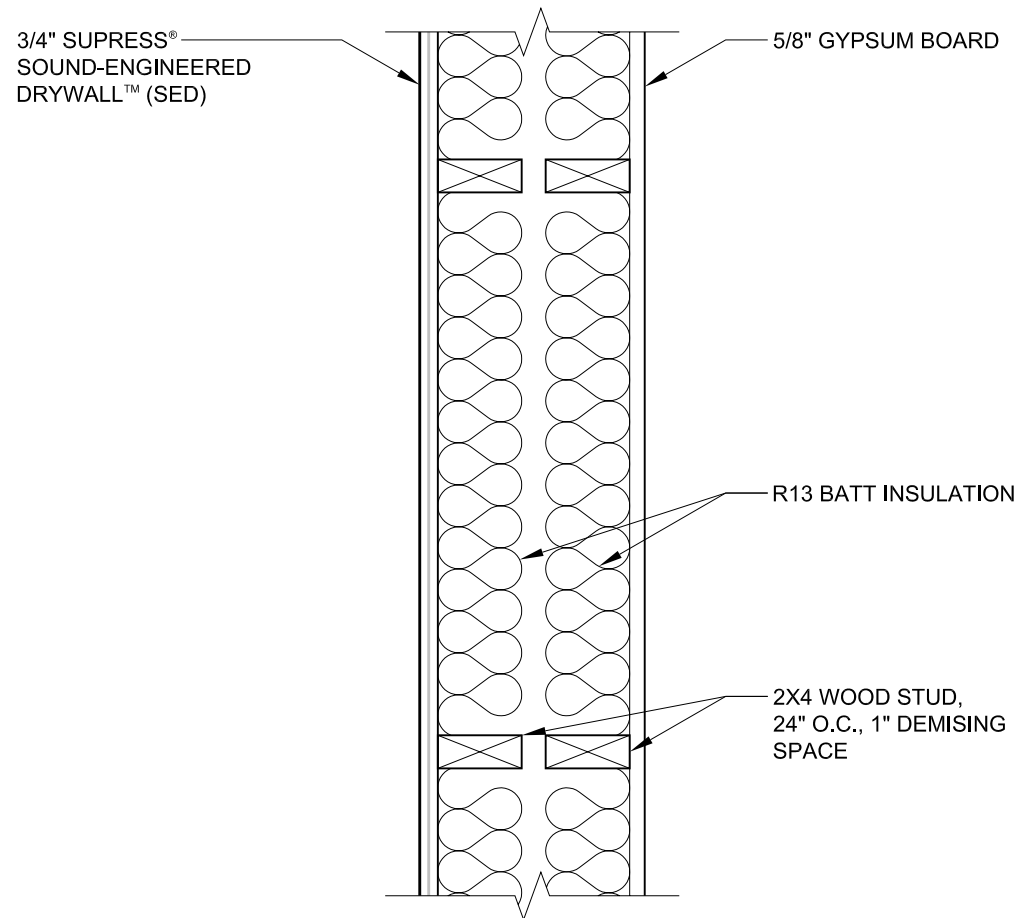


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 66

FIRE RATING: 1 HOUR

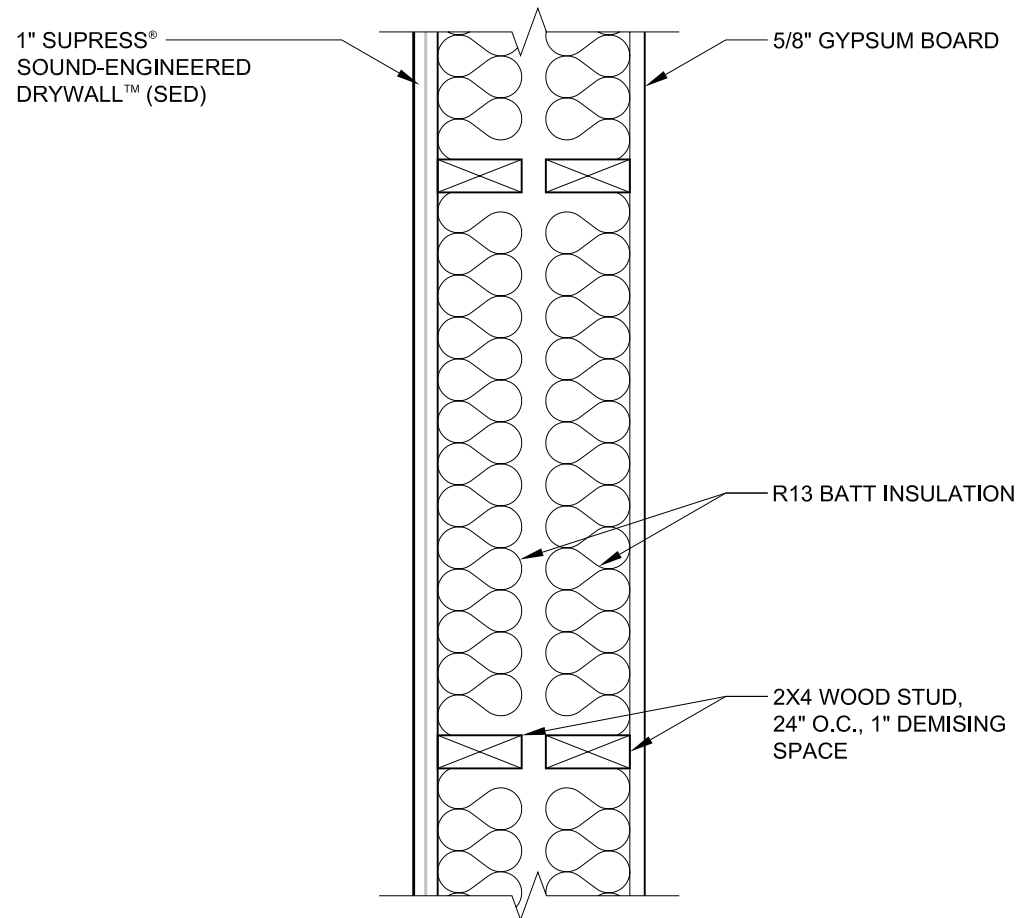


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, ONE SIDE

DRYWALL LAYER: SINGLE 5/8" LAYER, ONE SIDE

STC: 68

FIRE RATING: 1 HOUR

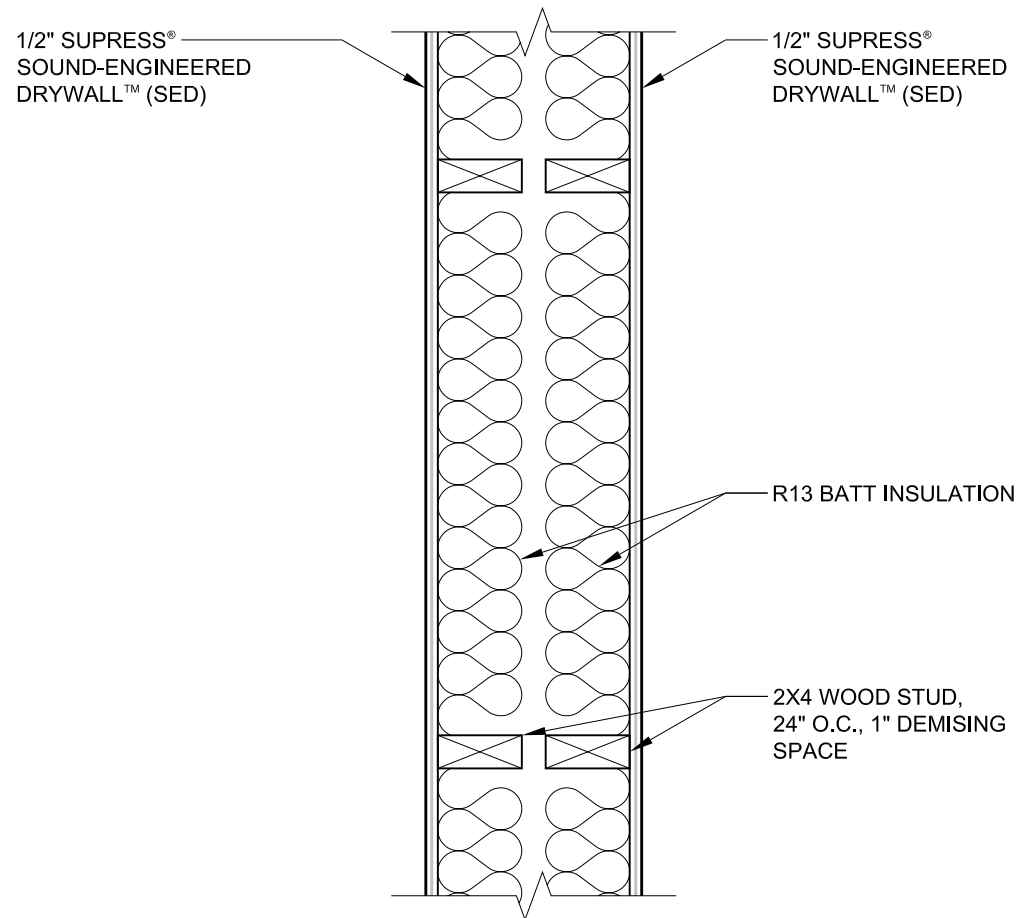


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1/2" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 62

FIRE RATING: 1 HOUR

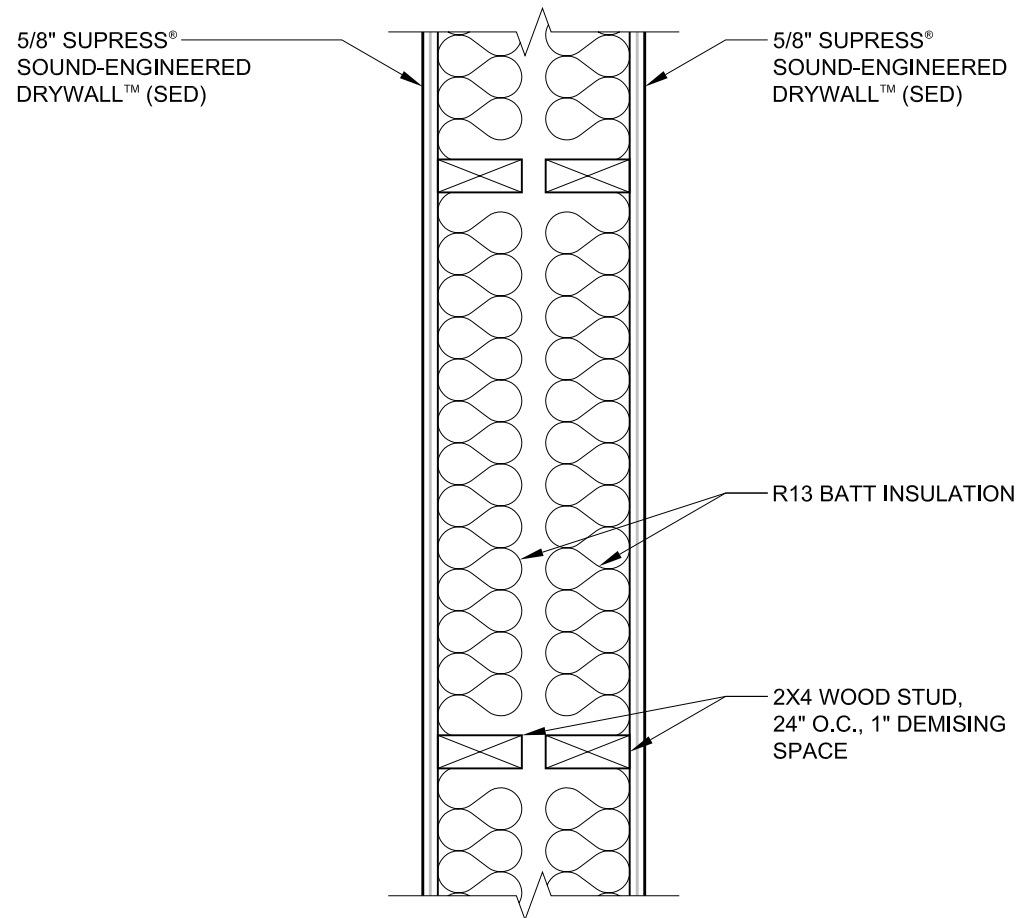


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 5/8" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 64

FIRE RATING: 1 HOUR

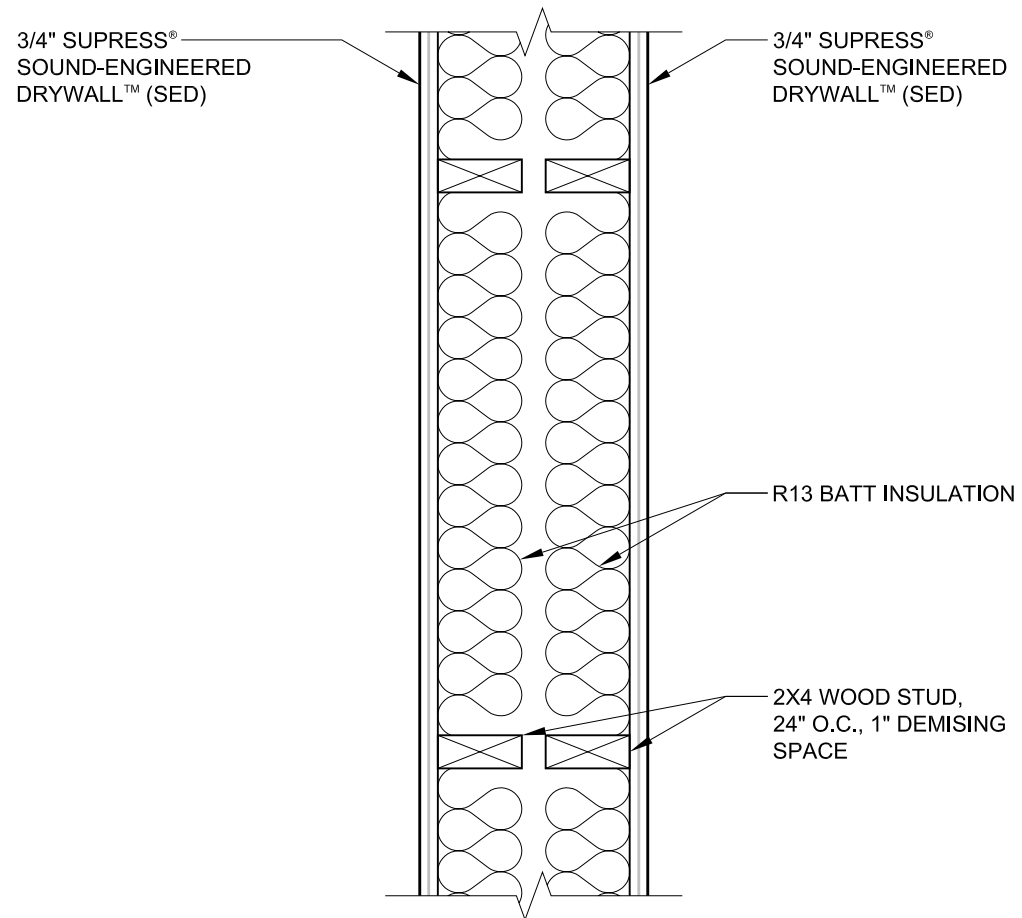


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 3/4" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 68

FIRE RATING: 1 HOUR

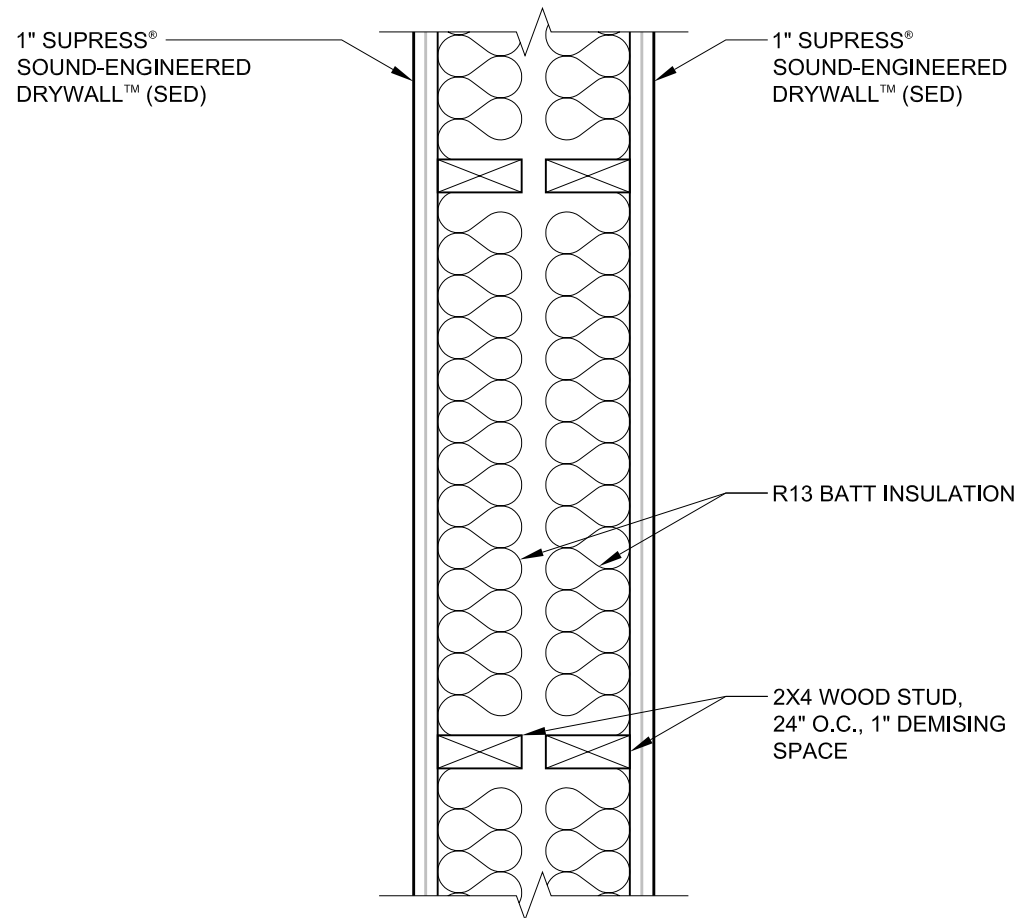


NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: SINGLE 1" LAYER, BOTH SIDES

DRYWALL LAYER: NONE

STC: 72

FIRE RATING: 2 HOUR

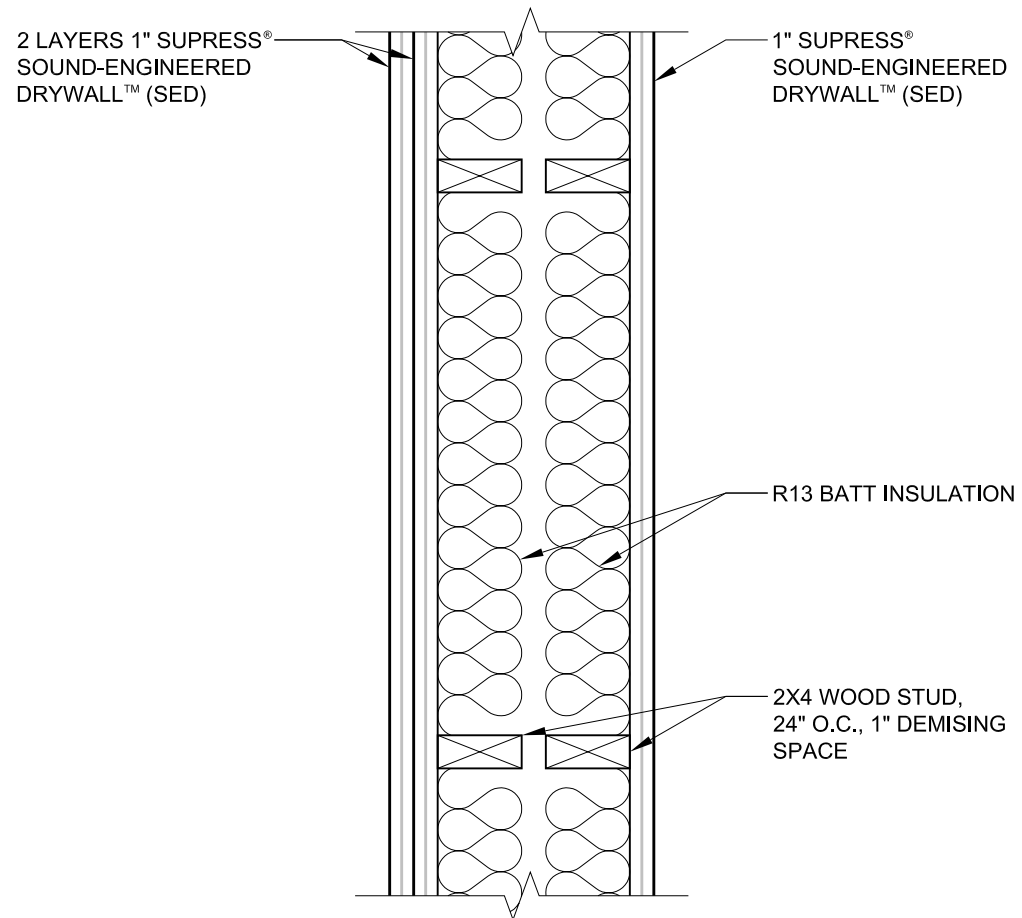

NEW CONSTRUCTION - WOOD STUDS

SUPRESS® SOUND-ENGINEERED DRYWALL™ (SED) LAYER: DOUBLE 1" LAYER - ONE SIDE,
SINGLE 1" LAYER - OTHER SIDE

DRYWALL LAYER: NONE
STC: 76
FIRE RATING: 2 HOUR